

NEW

OMRON

N-Smart

Presence / Detection / Measurement

Smart Laser Sensors
E3NC-L/E3NC-S

Smart Laser Sensor

Ideal for Long Range or Pinpoint
Presence/Absence Sensing



Compact
Laser Sensors
E3NC-L



Ultra-compact
CMOS Laser Sensors
E3NC-S



EtherCAT®

CompoNet™

CC-Link V2

realizing

A Wide Variety of Laser Sensor Heads That Solve



Fiber Sensor Challenges

E3NC Laser Sensor Solutions

The sensing distance is relatively short.

The beam spreads out at a 60-degree angle.

The spot is not visible at longer ranges.

The laser beam provides sufficient distance and a visible beam spot for stable detection

★ Illustration of laser beam spot.

Varying colors influence detection.

Incline changes influence detection.

The use of triangulation and CMOS provides stable detection for workpieces with different colors or with an inclination of the Sensor.

White ceramic

Black rubber

The distance is displayed instead of the incident level.

★ "2500" is an approximation for 250 mm.

Refer to page 8 for information on triangulation.

Applications Beyond the Realm of Fiber Sensors

E3NC-L series

Detection Requirement

Stable presence detection




Long-distance detection with installation on only one side



High-precision positioning



Presence E3NC-L series of Compact Laser Sensors

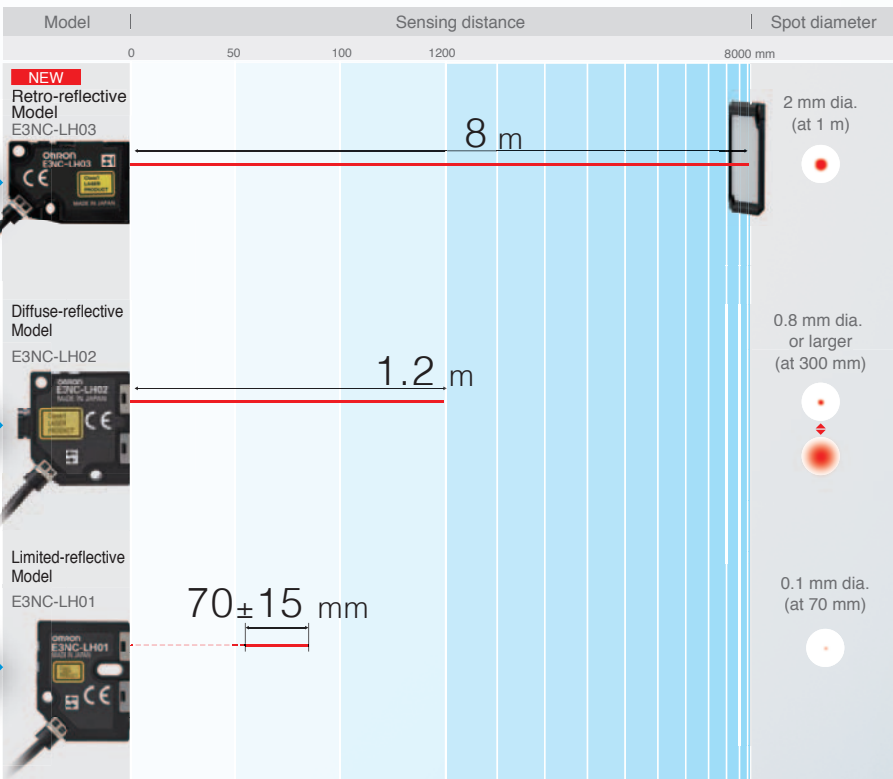

Page 4

Page 6

Page 7

Stable detection even with workpieces of different colors




Stable detection even with the Sensor installed at an angle



Page 8

Page 9

Detection E3NC-S series of Ultra-compact CMOS Laser Sensors

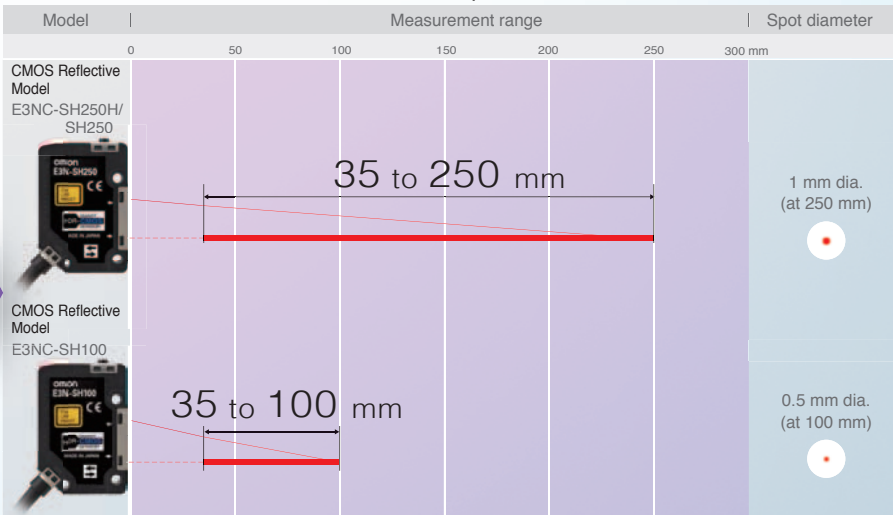


E3NC-S series



Retro-reflective Model


E3NC-LH03

NEW



* The E39-R21 and E39-R22 Reflectors are also IP67.

Stable Detection of a Wide Range of Workpieces, Including Transparent Targets

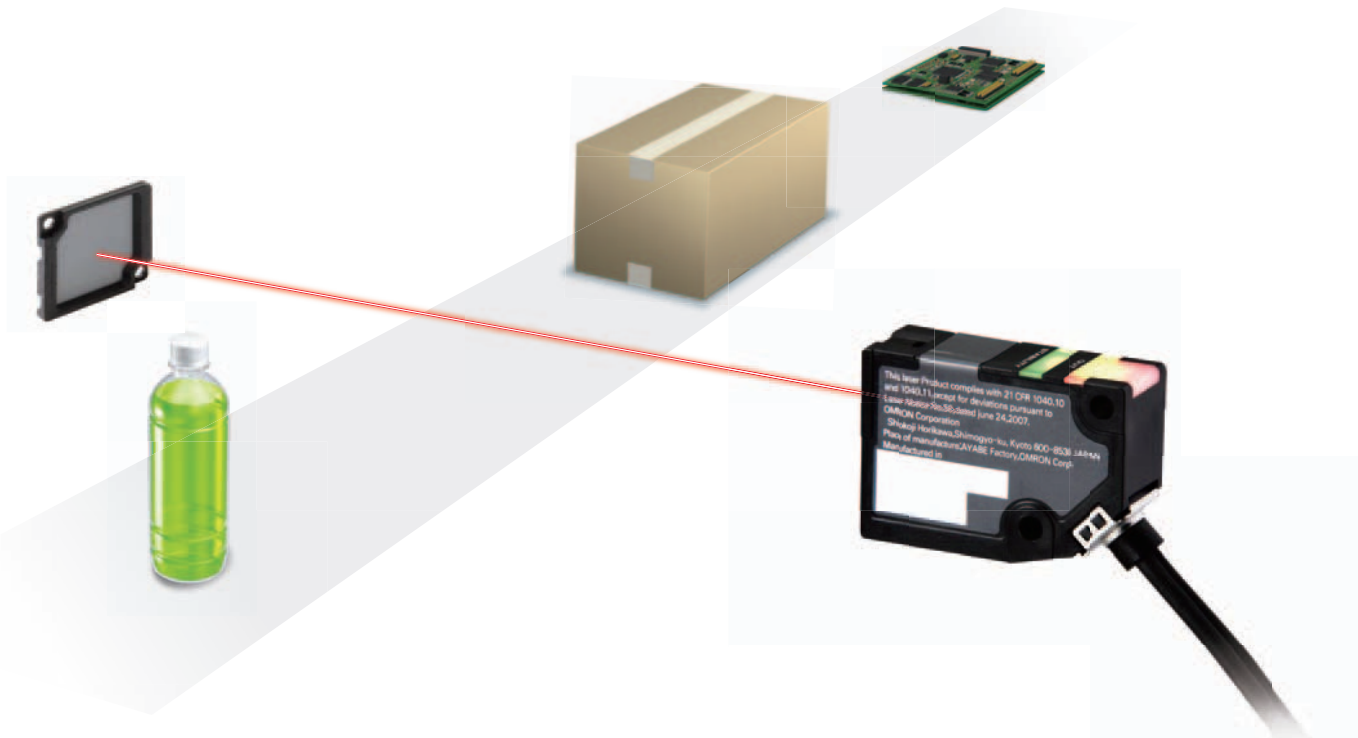


Visible spot even at long distances.

Maximum sensing distance of **8 m**


Application

Detection of Remaining Sheet Metal in a Press

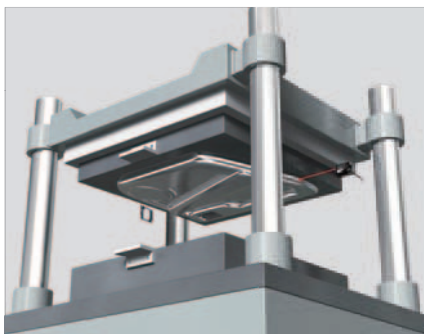


The small, long-distance spot can stably detect large pieces of sheet metal that remain on a press.

Detection of Two PCBs

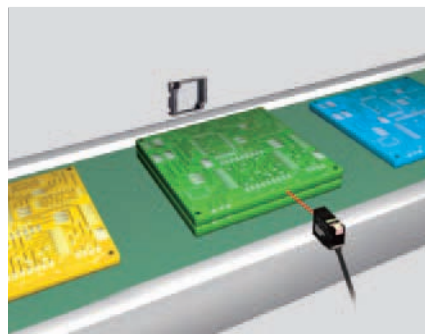

The small beam spot can detect two PCBs accidentally stacked together.

Detection of Overlapping Lids

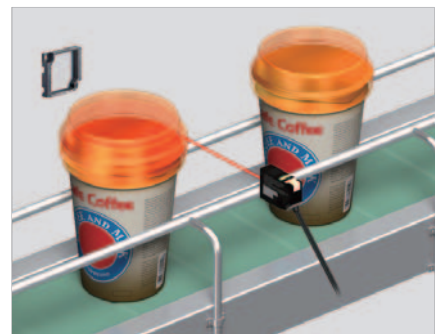

The small beam spot stably detects overlapping lids on cups.




Detects Film That's 95% Transparent

High-frequency Modulation for Stable Detection of Even Minor Variations in the Thickness or Position of Transparent Objects


High-frequency Modulation

Conventional emitted laser beams have a single wavelength. With high-frequency Modulation, the emitted laser beam is controlled so that it contains multiple wavelengths.


Wavelength Distribution of Conventional Emission

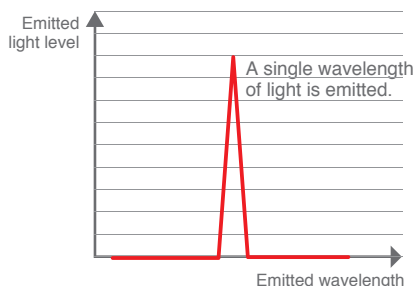


Wavelength Distribution of High-frequency Modulation

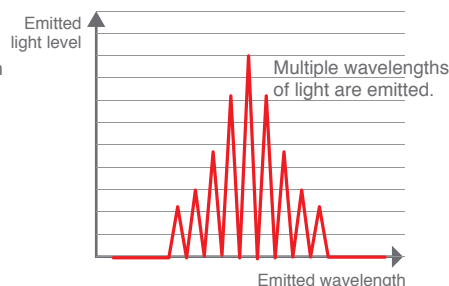

Conventional Transparent Object Detection

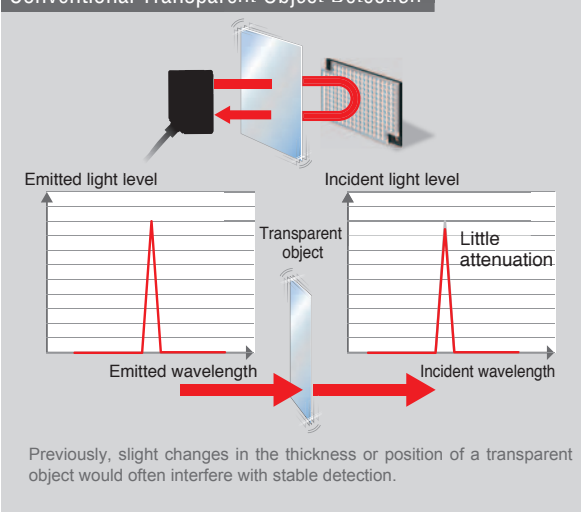


Transparent Object Detection with High-frequency Modulation

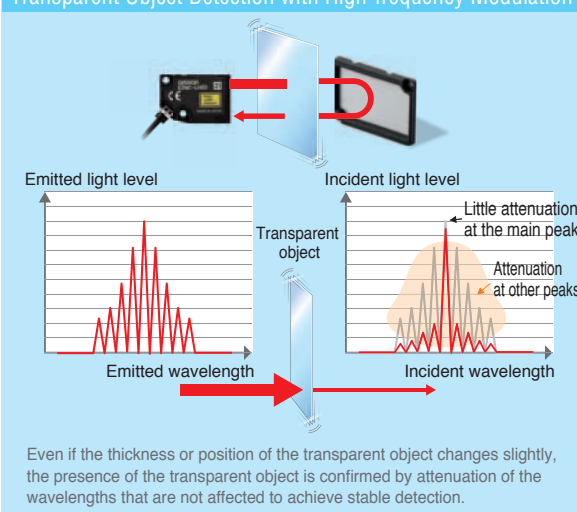

Application

Detecting Glass Wafer Protrusion

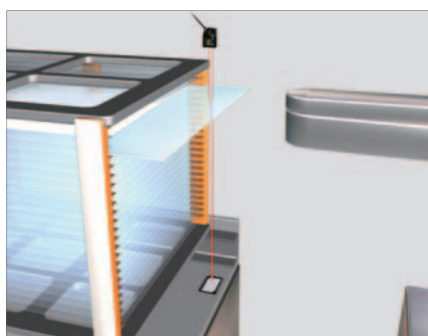


The high ability to detect transparent objects enables stable detection of highly transparent glass wafers.

Detecting the Height of Shrink Packaging Film



The large difference in light levels even for transparent films enables stable detection of thin packaging films.

Detecting Two Sheets of Transparent Film

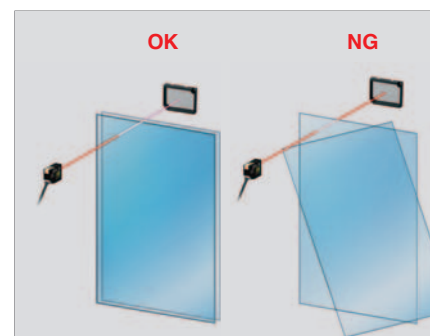


Even small differences in incident light level are captured to enable detection of two sheets of transparent film.



Diffuse-reflective Model


E3NC-LH02



Laser Class 1



IP65 *



Robot Cable

* Only when adjuster is locked.


E3NC-L series

Long-distance and Variable Beam Spot for Application Versatility

0.8 mm dia.
or larger

Visible spot even at long distances.
Maximum Sensing Distance:


1.2 m

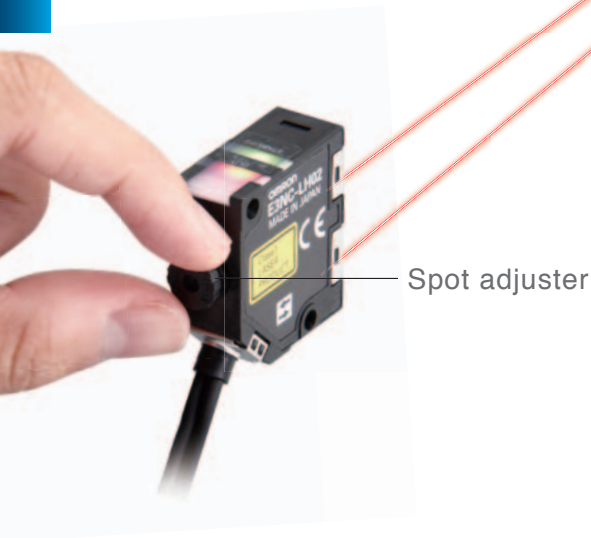

Adjust the Spot to the Target or Application for Stable Detection.


Variable Spot

You can adjust the spot size to the target size or sensing surface conditions for improved detection stability. The use of a crown lock eliminates the need for tools to lock the spot adjuster. Just press the adjuster to lock it and prevent the settings from changing.

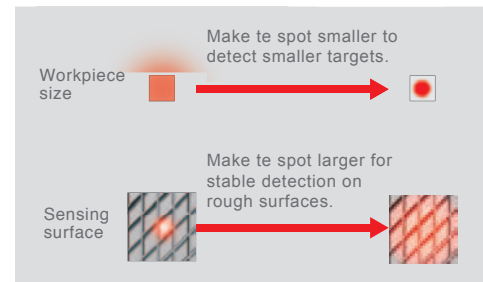


Application

Thread Presence Detection

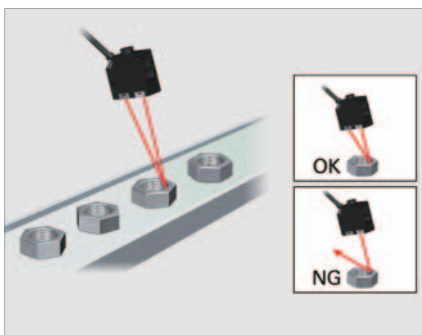


The spot is made wider so that the presence of threading in nuts can be detected.

Glass Substrate Mark Detection

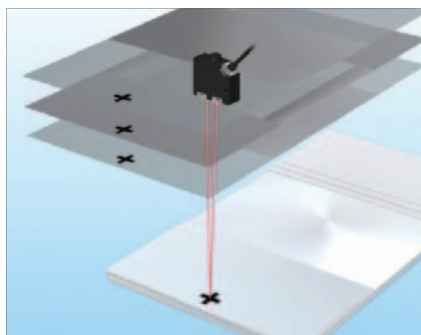

With a maximum sensing distance of 1.2 m, long-distance mark detection is stable.

Workpiece Presence Detection through Narrow Gaps

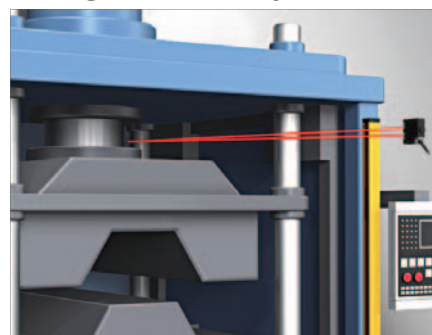

Even detailed locations that are recessed in machines can be stably detected from a distance.



Limited-reflective Model

E3NC-LH01

Laser Class 1



IP65



Robot Cable



Minute Beam Spot for High-precision Detection


High-precision Positioning

Minute spot with

0.1 mm dia.

Pin-point precision positioning to $\pm 10 \mu\text{m}$. *

* With Smart Tuning. Depends on the workpiece.

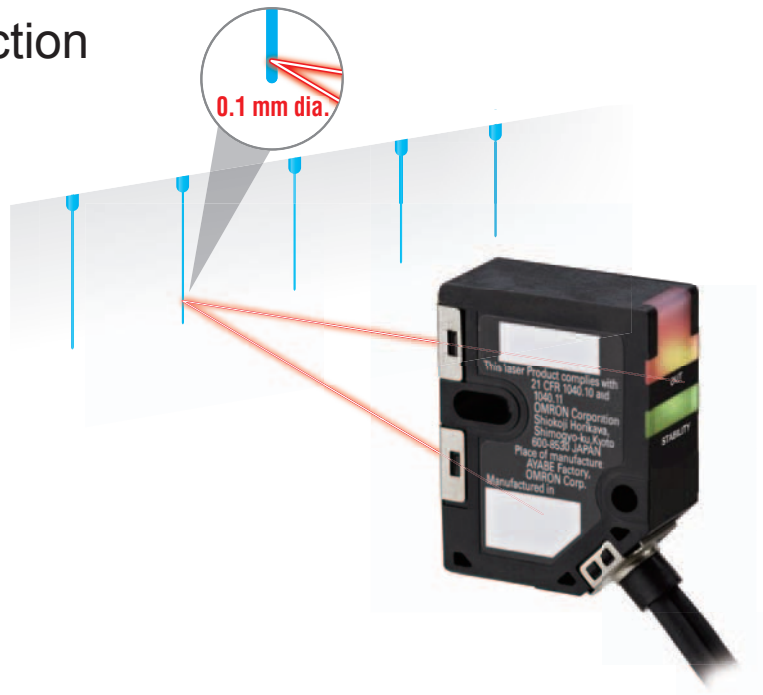

No Detection Outside of Detection Window


Limited detection with a sensing distance of

70±15 mm

Limited reflection means that objects are detected only within a sensing distance of 70 mm ± 15 mm even if there are workpieces or reflective objects closer or farther away. This helps prevent false detection.


Application

Detecting the Presence of Needle Caps

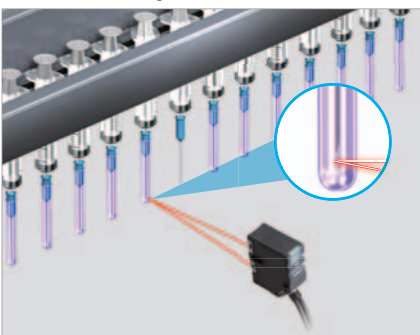


The minute 0.1-mm spot is targeted only at the end of the cap for stable detection.

PCB Arrival Confirmation

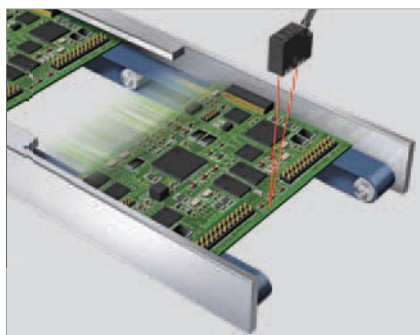

The laser beam forms a minute spot to detect arrival with high precision.


Ring Joint Location Detection

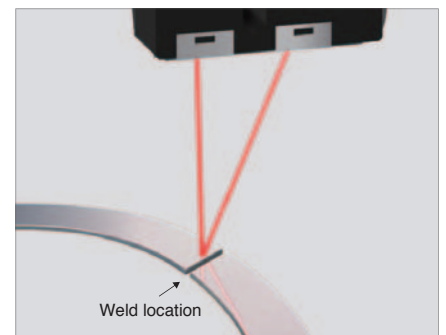

The minute, sharp laser beam stably detects 0.1 mm seams.




E3NC-SH250H/SH250
E3NC-SH100



★ E3NC-SH250H only. The E3NC-SH250 and E3NC-SH100 are laser class 1.

Stable Detection Regardless of Workpiece Color, Material, or Surface Condition
Even for Glossy or Cast Metals


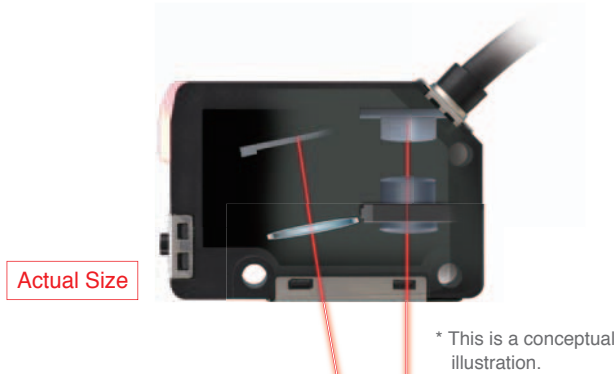


OMRON's Unique HSDR-CMOS (High Speed and Dynamic Range)
Dynamic Range of Up to 500,000 Times

The shutter time of the CMOS is adjusted to the workpiece. The emission power is then adjusted to optimize the amount of dispersed light that is received.


Measuring Bright Workpieces

Measuring Dark Workpieces

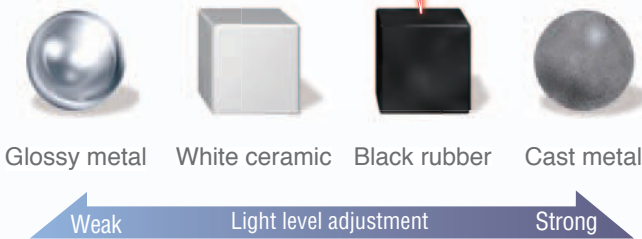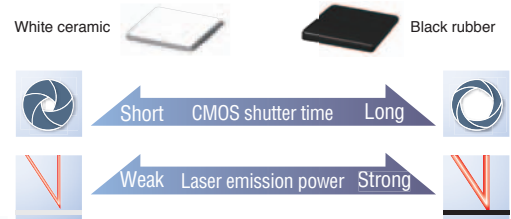


Stable Detection with Triangulation

Targets located at different distances from the sensor will reflect light onto a different spot of the Position Sensitive Device. The PSD is therefore only concerned with location of light received rather than how much light is received. This reduces effects of changing color or surface finish.

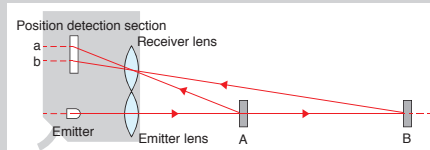


Application

Detecting the Presence of Exterior Wall Material

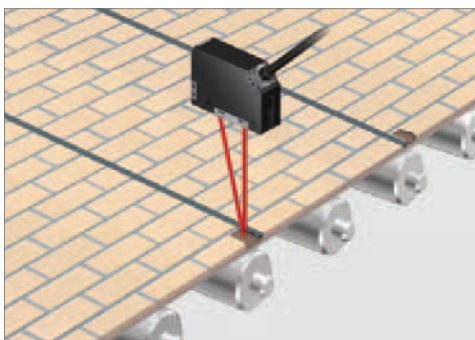


With the CMOS Sensor, stable detection is possible even if the workpiece's color or surface conditions are not consistent.

O-ring Presence Detection

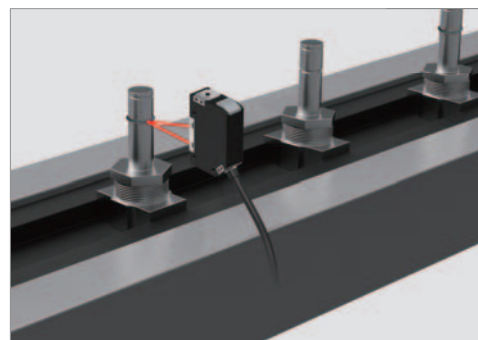

With the CMOS Sensor, stable detection is possible even with low-reflectance workpieces.

Increased Mounting Flexibility

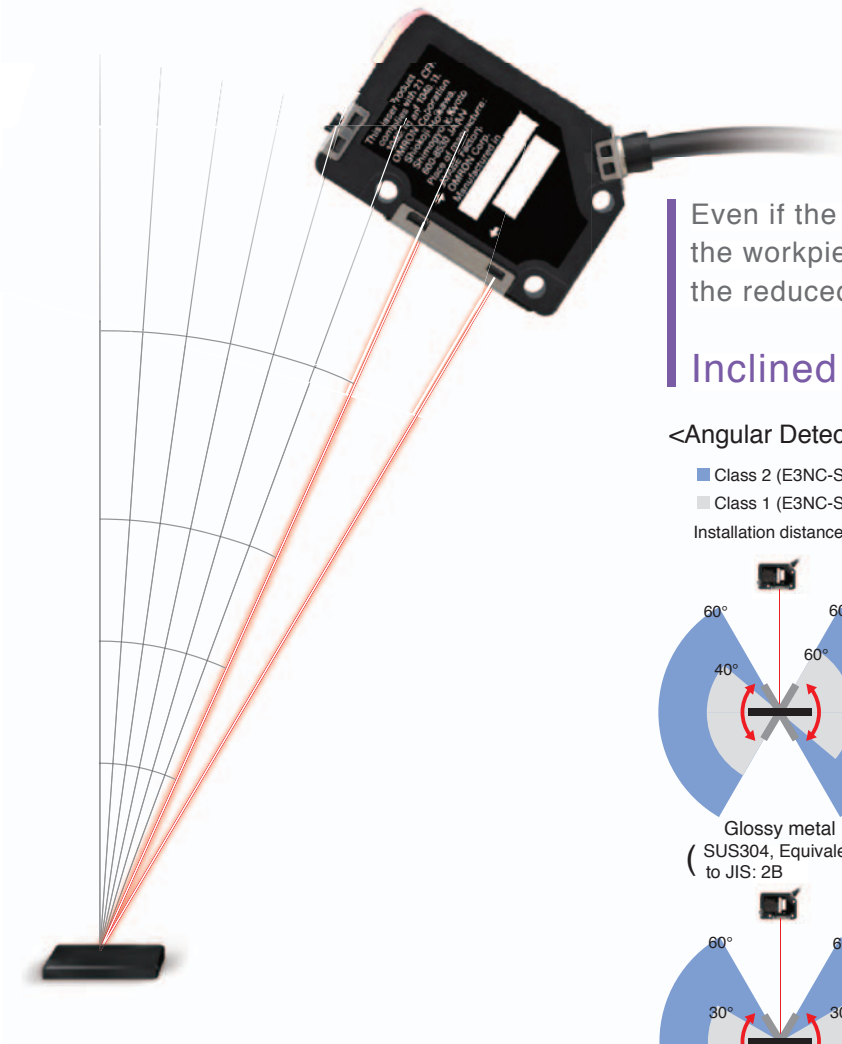

Even if the Sensor is mounted at an angle, the workpiece can still be detected due to the reduced mounting restrictions.


Inclined mounting at up to **60°**

<Angular Detection Range>

■ Class 2 (E3NC-SH250H)


■ Class 1 (E3NC-SH250)

Installation distance: 250 mm

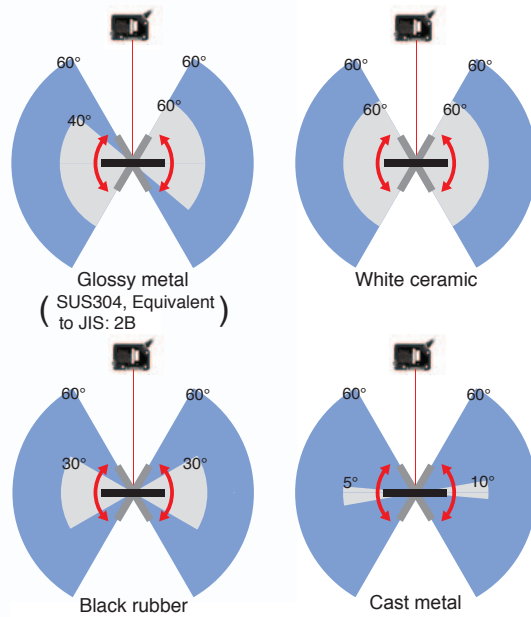

Application

Detecting Holes Made in Metal Parts

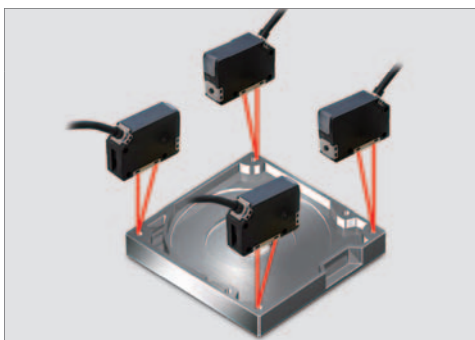

The Sensors are influenced very little by the surface conditions of the workpiece, allowing level differences on metal surfaces to be stably detected.

Detection of Cut Position on Rubber Hose



Even if the Sensor is mounted at an angle, stable detection is possible for workpieces with low reflection.



Lens Attachments

E39-P51 (For E3NC-LH03 Retro-reflective Models)

E39-P52 (For E3NC-LH02 Diffuse-reflective Models)

NEW



Solve Even More Applications with a Line Beam




Selectable Line Beam Shape

You can mount a Lens Attachment to the E3NC-LH02 and adjust the spot to create various shapes of line beams. Adjusting the beam shape to your specific workpiece enables even more-stable detection.



Rubber Sealing

The Lens Attachments have internal rubber packings to reduce the entry of dirt between the Sensor Head and Lens Attachment.

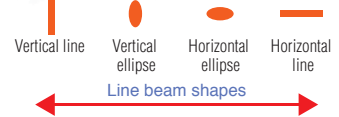


Application

Presence Detection of Powders or Liquids




With a wider beam, you can stably detect powders and liquids because they are less likely to fall outside of the beam.

Detection of Faulty Cap Assembly

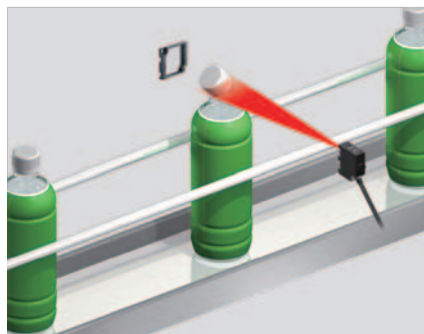

Using a line beam allows you to detect caps that are not attached correctly with a single Sensor.

Presence Detection of Rubber Sheets

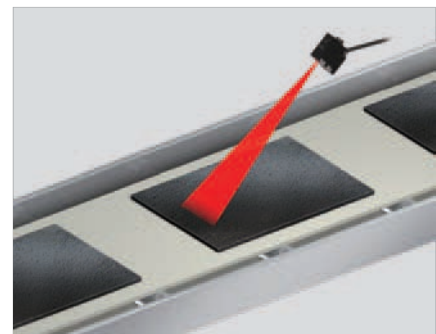

The wide sensing area helps eliminate the influences of color differences in the rubber sheet to enable stable detection.

Laser Amplifier Units

E3NC-LA

Laser Amplifier Units (CMOS Type)

E3NC-SA



Consistent Operating Methods for All N-Smart Amplifier Units. White Display Characters for High Visibility.


Automatically Select Optimized Settings for the Application



Smart Tuning


Common* Functions
Basic Tuning
Two-point Tuning

The larger incident level between measurements with and without a workpiece is set to 9,999.

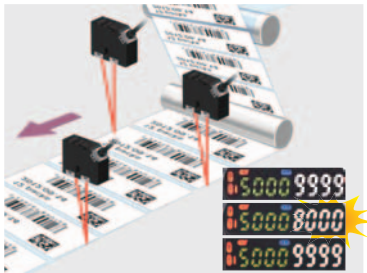


Common* Functions
High-speed Workpieces
Full Auto Tuning

You can adjust to moving workpieces without stopping the line.

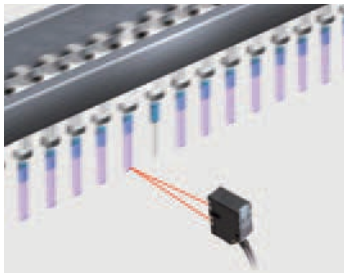

Additional E3NC-LA Functions
High-precision Positioning
Position Tuning

High-precision, pinpoint workpiece positioning is possible.

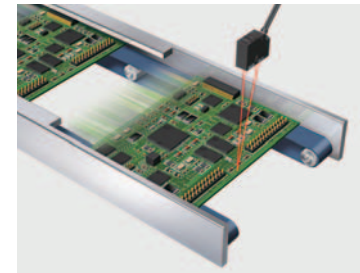


* The common functions are provided by both the E3NC-LA and the E3NC-SA.

Additional E3NC-LA Functions

Long-term Stable Detection with Essentially No Maintenance Even When the Sensor Is Dirty

DPC (Dynamic Power Control)


Even if dirt or machine vibration reduces the amount of light received, OMRON's unique DPC automatically compensates the displayed incident level to achieve stable, high-precision detection.

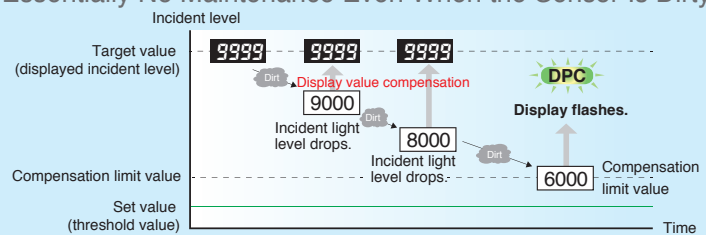

Additional E3NC-SA Functions


Stable Detection of Everything But the Background
Tuning without a Workpiece

Calibrate with the background as your reference surface. This enables stable detection of any target that passes, regardless of shape, color, or surface condition..

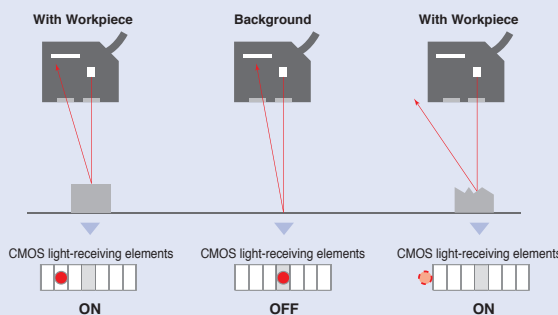

Easy Adjustment after Head Installation
Easy-to-understand Distance Display (*Approximation)

You can see the distance at a glance, which simplifies adjustment. After head installation, you can reduce adjustment time after line switchovers and reduce line stoppage time.

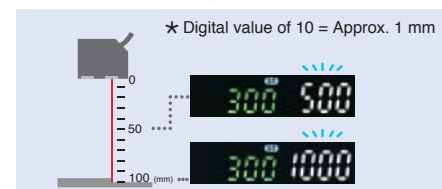

Simple and Dependable

The N-Smart Lineup of Next-generation Fiber Sensors and Laser Sensors will quickly solve your problems and therefore increase equipment operation rates and minimize downtime with optimum cost performance.

N-Smart
Presence / Detection / Measurement

E3NX-FA
Fiber Amplifier Units
A New Standard for Fiber Optic Sensor Performance

E3NC-S
Ultra-compact CMOS Laser Sensors
Stable Detection Even for 1.5-mm Level Differences

E3NC-L
Compact Laser Sensors
From Minute Workpieces to Long-distance Detection

E3NW
Sensor Communications Units
Easy application with consistent operating procedures


Applications with Many Sensors:
More convenience and even lower costs with a network

EtherCAT
CompoNet
CC-Link V2

Common Features and Models in the N-Smart Series

Common Buttons

Intuitive Operation and Easy Setup.

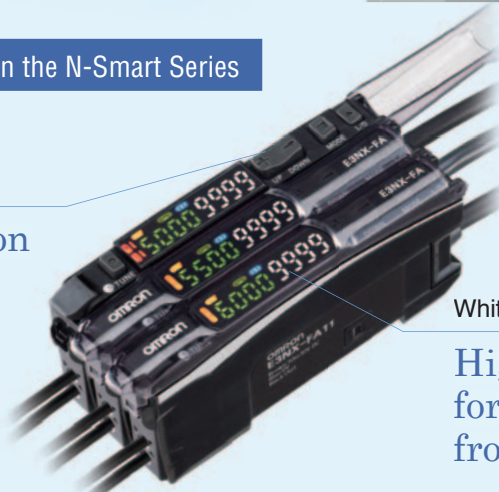

White Characters on a Black Background

High-contrast displays for easy visibility from a distance.

Models with Wire-saving Connectors Popular

No Master/Slave Distinctions in Amplifier Units

- **Reduce model numbers in stock**


You do not need to stock master and slave amplifier units.

- **Greatly reduced wiring work**

Power is supplied from the Master Connector. Slave Connectors have only output lines.

- **Expansion is easy and reliable**

Mutual interference prevention works even if you use a Master Connector instead of a Slave Connector or combine them with pre-wired models.

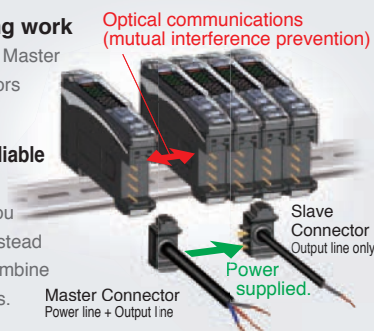

Model for Sensor Communications Unit

Data Management and Time Reduction with Network Communications

- **Three communications methods are supported**







- **Use Distributed Sensor Units to reduce equipment production costs and commissioning time**



EtherCAT
CompoNet
CC-Link V2

Ordering Information





Sensor Heads: E3NC-L Compact Laser Sensor Series

Sensing method	Appearance	Beam shape	Sensing distance	Laser class	Cable length	Model
Coaxial Retro-reflective with MSR function		Spot	 8 m *	Class 1	2 m	E3NC-LH03 2M NEW
					5 m	E3NC-LH03 5M NEW
Diffuse-reflective		Variable spot	 1.2 m		2 m	E3NC-LH02 2M
					5 m	E3NC-LH02 5M NEW
Limited-reflective		Spot	 70±15 mm		2 m	E3NC-LH01 2M
					5 m	E3NC-LH01 5M NEW

* These values apply when an E39-R21, E39-R22, E39-RS10, or E39-RS11 Reflector is used. A Reflector is not included. Purchase a Reflector separately to match the intended use of the Sensor.

Note: Only an E3NC-LA□□ Amplifier Unit can be connected.



Amplifier Units: E3NC-L Compact Laser Sensor Series

Connecting method	Appearance	Inputs/outputs	Model	
			NPN output	PNP output
Pre-wired (2 m)		2 outputs + 1 input	E3NC-LA21 2M	E3NC-LA51 2M
Wire-saving Connector		1 output + 1 input	E3NC-LA7	E3NC-LA9
M8 Connector		1 output + 1 input	E3NC-LA24	E3NC-LA54
Amplifier for Sensor Communications Unit *		2 outputs	E3NC-LA0	

* A Sensor Communications Unit is required if you want to use the Amplifier Unit on a network.





Note: Only an E3NC-LH□□ Sensor Head can be connected.

Sensor Heads: E3NC-S Ultra-compact CMOS Laser Sensor Series

Sensing method	Appearance	Beam shape	Measurement range	Laser class	Cable length	Model
Distance-settable		Spot	 35 to 250 mm	Class 2	2 m	E3NC-SH250H 2M
				Class 1	2 m	E3NC-SH250 2M
					2 m	E3NC-SH100 2M

Note: Only an E3NC-SA□□ Amplifier Unit can be connected.

Amplifier Units: E3NC-S Ultra-compact CMOS Laser Sensor Series

Connecting method	Appearance	Inputs/outputs	Model	
			NPN output	PNP output
Pre-wired (2 m)		2 outputs + 1 input	E3NC-SA21 2M	E3NC-SA51 2M
Wire-saving Connector		1 output + 1 input	E3NC-SA7	E3NC-SA9
M8 Connector		1 output + 1 input	E3NC-SA24	E3NC-SA54
Amplifier for Sensor Communications Unit *		2 outputs	E3NC-SA0	





* A Sensor Communications Unit is required if you want to use the Amplifier Unit on a network.
Note: Only an E3NC-SH□□ or E3NC-SH□□H Sensor Head can be connected.

Accessories (Sold Separately)

Sensor Head Accessories

Reflectors for Retro-reflective Sensors **NEW**

A Reflector is not provided with the Sensor Head. It must be ordered separately as required.

Applicable Sensor Head	Appearance	Model	Quantity
E3NC-LH03	 30x35	E39-R21	1
	 55x40	E39-R22	
	 25x25	E39-RS10	
	 50x50	E39-RS11	

Lens Attachments for Sensor Heads **NEW**






A Lens Attachment is not provided with the Sensor Head. It must be ordered separately as required.

Applicable Sensor Head	Appearance	Model	Quantity
E3NC-LH03		E39-P51	1
E3NC-LH02		E39-P52	

Note: You can combine the Lens Attachment with an applicable Sensor Head to create a line beam.

Sensor Head Mounting Brackets



A Mounting Bracket is not provided with the Sensor Head. It must be ordered separately as required.

Applicable Sensor Head	Appearance	Model	Quantity	Contents
E3NC-LH03		E39-L190 NEW	1	Mounting Bracket: 1 Nut plate: 1 Phillips screws (M3×18): 2
E3NC-LH02		E39-L185		
E3NC-LH01		E39-L186		
E3NC-SH250H E3NC-SH250 E3NC-SH100		E39-L187		
		E39-L188		

Amplifier Unit Accessories



Wire-saving Connectors (Required for models for Wire-saving Connectors.)

Connectors are not provided with the Amplifier Unit and must be ordered separately. *Protective stickers are provided.

Type	Appearance	Cable length	No. of conductors	Model
Master Connector		2 m	4	E3X-CN21
Slave Connector			2	E3X-CN22


Sensor I/O Connectors (Required for models for M8 Connectors.)

Connectors are not provided with the Amplifier Unit and must be ordered separately.

Size	Cable	Appearance	Cable type	Model	
M8	Standard cable	Straight 	2 m	4-wire	XS3F-M8PVC4S2M
			5 m		XS3F-M8PVC4S5M
		L-shaped 	2 m		XS3F-M8PVC4A2M
			5 m		XS3F-M8PVC4A5M


Amplifier Unit Mounting Bracket

A Mounting Bracket is not provided with the Amplifier Unit. It must be ordered separately as required.

Appearance	Model	Quantity
	E39-L143	1


DIN Track

A DIN Track is not provided with the Amplifier Unit. It must be ordered separately as required.

Appearance	Type	Model	Quantity
	Shallow type, total length: 1 m	PFP-100N	1
	Shallow type, total length: 0.5m	PFP-50N	
	Deep type, total length: 1 m	PFP-100N2	





End Plate

Two End Plates are provided with the Sensor Communications Unit. End Plates are not provided with the Amplifier Unit. They must be ordered separately as required.

Appearance	Model	Quantity
	PFP-M	1

Related Products

Sensor Communications Units

Type	Appearance	Model
Sensor Communications Unit for EtherCAT		E3NW-ECT
Sensor Communications Unit for CompoNet *1		E3NW-CRT
Sensor Communications Unit for CC-Link *1		E3NW-CCL
Distributed Sensor Unit *2		E3NW-DS

*1. Refer to your OMRON website for details.

*2. The Distributed Sensor Unit can be connected to any of the Sensor Communications Units.




EtherCAT® is a registered trademark and patented technology, licensed by Beckhoff Automation GmbH, Germany.

CompoNet is a registered trademark of the ODVA.

CC-Link is a registered trademark of Mitsubishi Electric Corporation. The trademark is managed by the CC-Link Partner Association.

OMRON's CMOS Laser Sensor Lineup

Select the best match to your application from our wide lineup.

		Installation distance	Detectable level difference	Resolution
Measurement	<p>Stable measurements in the order of 10 μm at a reasonable cost with essentially manual-free operation.</p> <p>ZX2</p> 	100 mm ^{*1}	—	5 μm
	<p>Ideal for simple measurements.</p> <p>ZX1</p> 	300 mm ^{*1}	—	30 μm
Detection		100 mm ^{*1}	—	7 μm
	<p>Stable detection of level differences in the order of 0.1 mm.</p> <p>ZX0</p> 	300 mm ^{*1}	3.0 mm ^{*2}	350 μm
		100 mm ^{*1}	0.7 mm ^{*2}	80 μm
	<p>Dependable presence/absence detection in a compact body.</p> <p>E3NC-S</p> 	250 mm	9.0 mm ^{*2}	—
		100 mm	1.5 mm ^{*2}	—

*1. Sensors are also available for other installation distances.

*2. The value depends on conditions. Refer to product datasheets or refer to product information on your OMRON website.

EtherCAT® is a registered trademark and patented technology, licensed by Beckhoff Automation GmbH, Germany.

CompoNet is a registered trademark of the ODVA.

CC-Link is a registered trademark of Mitsubishi Electric Corporation. The trademark is managed by the CC-Link Partner Association.

Terms and Conditions of Sale

1. **Offer; Acceptance.** These terms and conditions (these "**Terms**") are deemed part of all quotes, agreements, purchase orders, acknowledgments, price lists, catalogs, manuals, brochures and other documents, whether electronic or in writing, relating to the sale of products or services (collectively, the "**Products**") by Omron Electronics LLC and its subsidiary companies ("**Omron**"). Omron objects to any terms or conditions proposed in Buyer's purchase order or other documents which are inconsistent with, or in addition to, these Terms.
2. **Prices; Payment Terms.** All prices stated are current, subject to change without notice by Omron. Omron reserves the right to increase or decrease prices on any unshipped portions of outstanding orders. Payments for Products are due net 30 days unless otherwise stated in the invoice.
3. **Discounts.** Cash discounts, if any, will apply only on the net amount of invoices sent to Buyer after deducting transportation charges, taxes and duties, and will be allowed only if (i) the invoice is paid according to Omron's payment terms and (ii) Buyer has no past due amounts.
4. **Interest.** Omron, at its option, may charge Buyer 1-1/2% interest per month or the maximum legal rate, whichever is less, on any balance not paid within the stated terms.
5. **Orders.** Omron will accept no order less than \$200 net billing.
6. **Governmental Approvals.** Buyer shall be responsible for, and shall bear all costs involved in, obtaining any government approvals required for the importation or sale of the Products.
7. **Taxes.** All taxes, duties and other governmental charges (other than general real property and income taxes), including any interest or penalties thereon, imposed directly or indirectly on Omron or required to be collected directly or indirectly by Omron for the manufacture, production, sale, delivery, importation, consumption or use of the Products sold hereunder (including customs duties and sales, excise, use, turnover and license taxes) shall be charged to and remitted by Buyer to Omron.
8. **Financial.** If the financial position of Buyer at any time becomes unsatisfactory to Omron, Omron reserves the right to stop shipments or require satisfactory security or payment in advance. If Buyer fails to make payment or otherwise comply with these Terms or any related agreement, Omron may (without liability and in addition to other remedies) cancel any unshipped portion of Products sold hereunder and stop any Products in transit until Buyer pays all amounts, including amounts payable hereunder, whether or not then due, which are owing to it by Buyer. Buyer shall in any event remain liable for all unpaid accounts.
9. **Cancellation; Etc.** Orders are not subject to rescheduling or cancellation unless Buyer indemnifies Omron against all related costs or expenses.
10. **Force Majeure.** Omron shall not be liable for any delay or failure in delivery resulting from causes beyond its control, including earthquakes, fires, floods, strikes or other labor disputes, shortage of labor or materials, accidents to machinery, acts of sabotage, riots, delay in or lack of transportation or the requirements of any government authority.
11. **Shipping; Delivery.** Unless otherwise expressly agreed in writing by Omron:
 - a. Shipments shall be by a carrier selected by Omron; Omron will not drop ship except in "break down" situations.
 - b. Such carrier shall act as the agent of Buyer and delivery to such carrier shall constitute delivery to Buyer;
 - c. All sales and shipments of Products shall be FOB shipping point (unless otherwise stated in writing by Omron), at which point title and risk of loss shall pass from Omron to Buyer; provided that Omron shall retain a security interest in the Products until the full purchase price is paid;
 - d. Delivery and shipping dates are estimates only; and
 - e. Omron will package Products as it deems proper for protection against normal handling and extra charges apply to special conditions.
12. **Claims.** Any claim by Buyer against Omron for shortage or damage to the Products occurring before delivery to the carrier must be presented in writing to Omron within 30 days of receipt of shipment and include the original transportation bill signed by the carrier noting that the carrier received the Products from Omron in the condition claimed.
13. **Warranties.** (a) **Exclusive Warranty.** Omron's exclusive warranty is that the Products will be free from defects in materials and workmanship for a period of twelve months from the date of sale by Omron (or such other period expressed in writing by Omron). Omron disclaims all other warranties, express or implied. (b) **Limitations.** OMRON MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, ABOUT NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OF THE PRODUCTS. BUYER ACKNOWLEDGES THAT IT ALONE HAS DETERMINED THAT THE PRODUCTS WILL SUITABLY MEET THE REQUIREMENTS OF THEIR INTENDED USE. Omron further disclaims all warranties and responsibility of any type for claims or expenses based on infringement by the Products or otherwise of any intellectual property right. (c) **Buyer Remedy.** Omron's sole obligation hereunder shall be, at Omron's election, to (i) replace (in the form originally shipped with Buyer responsible for labor charges for removal or replacement thereof) the non-complying Product, (ii) repair the non-complying Product, or (iii) repay or credit Buyer an amount equal to the purchase price of the non-complying Product; provided that in no event shall Omron be responsible for warranty, repair, indemnity or any other claims or expenses regarding the Products unless Omron's analysis confirms that the Products were properly handled, stored, installed and maintained and not subject to contamination, abuse, misuse or inappropriate modification. Return of any Products by Buyer must be approved in writing by Omron before shipment. Omron Companies shall not be liable for the suitability or unsuitability or the results from the use of Products in combination with any electrical or electronic components, circuits, system assemblies or any other materials or substances or environments. Any advice, recommendations or information given orally or in writing, are not to be construed as an amendment or addition to the above warranty. See <http://www.omron247.com> or contact your Omron representative for published information.
14. **Limitation on Liability; Etc.** OMRON COMPANIES SHALL NOT BE LIABLE FOR SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS OR PRODUCTION OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCTS, WHETHER SUCH CLAIM IS BASED IN CONTRACT, WARRANTY, NEGLIGENCE OR STRICT LIABILITY. Further, in no event shall liability of Omron Companies exceed the individual price of the Product on which liability is asserted.
15. **Indemnities.** Buyer shall indemnify and hold harmless Omron Companies and their employees from and against all liabilities, losses, claims, costs and expenses (including attorney's fees and expenses) related to any claim, investigation, litigation or proceeding (whether or not Omron is a party) which arises or is alleged to arise from Buyer's acts or omissions under these Terms or in any way with respect to the Products. Without limiting the foregoing, Buyer (at its own expense) shall indemnify and hold harmless Omron and defend or settle any action brought against such Companies to the extent based on a claim that any Product made to Buyer specifications infringed intellectual property rights of another party.
16. **Property; Confidentiality.** Any intellectual property in the Products is the exclusive property of Omron Companies and Buyer shall not attempt to duplicate it in any way without the written permission of Omron. Notwithstanding any charges to Buyer for engineering or tooling, all engineering and tooling shall remain the exclusive property of Omron. All information and materials supplied by Omron to Buyer relating to the Products are confidential and proprietary, and Buyer shall limit distribution thereof to its trusted employees and strictly prevent disclosure to any third party.
17. **Export Controls.** Buyer shall comply with all applicable laws, regulations and licenses regarding (i) export of products or information; (ii) sale of products to "forbidden" or other proscribed persons; and (iii) disclosure to non-citizens of regulated technology or information.
18. **Miscellaneous.** (a) **Waiver.** No failure or delay by Omron in exercising any right and no course of dealing between Buyer and Omron shall operate as a waiver of rights by Omron. (b) **Assignment.** Buyer may not assign its rights hereunder without Omron's written consent. (c) **Law.** These Terms are governed by the law of the jurisdiction of the home office of the Omron company from which Buyer is purchasing the Products (without regard to conflict of law principles). (d) **Amendment.** These Terms constitute the entire agreement between Buyer and Omron relating to the Products, and no provision may be changed or waived unless in writing signed by the parties. (e) **Severability.** If any provision hereof is rendered ineffective or invalid, such provision shall not invalidate any other provision. (f) **Setoff.** Buyer shall have no right to set off any amounts against the amount owing in respect of this invoice. (g) **Definitions.** As used herein, "including" means "including without limitation"; and "Omron Companies" (or similar words) mean Omron Corporation and any direct or indirect subsidiary or affiliate thereof.

Certain Precautions on Specifications and Use

1. **Suitability of Use.** Omron Companies shall not be responsible for conformity with any standards, codes or regulations which apply to the combination of the Product in the Buyer's application or use of the Product. At Buyer's request, Omron will provide applicable third party certification documents identifying ratings and limitations of use which apply to the Product. This information by itself is not sufficient for a complete determination of the suitability of the Product in combination with the end product, machine, system, or other application or use. Buyer shall be solely responsible for determining appropriateness of the particular Product with respect to Buyer's application, product or system. Buyer shall take application responsibility in all cases but the following is a non-exhaustive list of applications for which particular attention must be given: (i) Outdoor use, uses involving potential chemical contamination or electrical interference, or conditions or uses not described in this document. (ii) Use in consumer products or any use in significant quantities. (iii) Energy control systems, combustion systems, railroad systems, aviation systems, medical equipment, amusement machines, vehicles, safety equipment, and installations subject to separate industry or government regulations. (iv) Systems, machines and equipment that could present a risk to life or property. Please know and observe all prohibitions of use applicable to this Product. NEVER USE THE PRODUCT FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY OR IN LARGE QUANTITIES WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO ADDRESS THE RISKS, AND THAT THE OMRON'S PRODUCT IS PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.
2. **Programmable Products.** Omron Companies shall not be responsible for the user's programming of a programmable Product, or any consequence thereof.
3. **Performance Data.** Data presented in Omron Company websites, catalogs and other materials is provided as a guide for the user in determining suitability and does not constitute a warranty. It may represent the result of Omron's test conditions, and the user must correlate it to actual application requirements. Actual performance is subject to the Omron's Warranty and Limitations of Liability.
4. **Change in Specifications.** Product specifications and accessories may be changed at any time based on improvements and other reasons. It is our practice to change part numbers when published ratings or features are changed, or when significant construction changes are made. However, some specifications of the Product may be changed without any notice. When in doubt, special part numbers may be assigned to fix or establish key specifications for your application. Please consult with your Omron's representative at any time to confirm actual specifications of purchased Product.
5. **Errors and Omissions.** Information presented by Omron Companies has been checked and is believed to be accurate; however, no responsibility is assumed for clerical, typographical or proofreading errors or omissions.

OMRON AUTOMATION AND SAFETY • THE AMERICAS HEADQUARTERS • Chicago, IL USA • 847.843.7900 • 800.556.6766 • www.omron247.com

OMRON CANADA, INC. • HEAD OFFICE

Toronto, ON, Canada • 416.286.6465 • 866.986.6766 • www.omron247.com

OMRON ELECTRONICS DE MEXICO • HEAD OFFICE

México DF • 52.55.59.01.43.00 • 01-800-226-6766 • mela@omron.com

OMRON ELECTRONICS DE MEXICO • SALES OFFICE

Apodaca, N.L. • 52.81.11.56.99.20 • 01-800-226-6766 • mela@omron.com

OMRON ELETRÔNICA DO BRASIL LTDA • HEAD OFFICE

São Paulo, SP, Brasil • 55.11.2101.6300 • www.omron.com.br

OMRON ARGENTINA • SALES OFFICE

Cono Sur • 54.11.4783.5300

OMRON CHILE • SALES OFFICE

Santiago • 56.9.9917.3920

OTHER OMRON LATIN AMERICA SALES

54.11.4783.5300

OMRON EUROPE B.V. • Wegalaan 67-69, NL-2132 JD, Hoofddorp, The Netherlands. • +31 (0) 23 568 13 00 • www.industrial.omron.eu

Authorized Distributor:

Automation Control Systems

- Machine Automation Controllers (MAC) • Programmable Controllers (PLC)
- Operator interfaces (HMI) • Distributed I/O • Software

Drives & Motion Controls

- Servo & AC Drives • Motion Controllers & Encoders

Temperature & Process Controllers

- Single and Multi-loop Controllers

Sensors & Vision

- Proximity Sensors • Photoelectric Sensors • Fiber-Optic Sensors
- Amplified Photomicrosensors • Measurement Sensors
- Ultrasonic Sensors • Vision Sensors

Industrial Components

- RFID/Code Readers • Relays • Pushbuttons & Indicators
- Limit and Basic Switches • Timers • Counters • Metering Devices
- Power Supplies

Safety

- Laser Scanners • Safety Mats • Edges and Bumpers • Programmable Safety Controllers • Light Curtains • Safety Relays • Safety Interlock Switches