

# Liquid Leakage Position Sensor K7L-UP-FLK

**Pinpoint Liquid Leakage Detection at Up to 600 m.  
Easy Setup and Installation.**



- Even unseen places under the floor can be pinpointed and restored.
- Detection of the extent of leakage and occurrence of a leak in another place.
- Monitoring at Up to 600 m with a Single Controller.
- The disconnection detection function constantly monitors for cable errors.
- A Wide Selection of Outputs from a Relay Output to Communications Output to Suit the System.
- The Sensing Cable is made of fluororesin for improved resistance to chemicals.
- Cables with connectors are easy to install.
- UL will be applied on November, 2009.




## List of Models

	Product name	Model	Quantity
	Liquid Leakage Position Sensor	<b>K7L-UP-FLK 100-240VAC</b>	1
①	Controller (See Note.1)	<b>K7L-UP-FLK 100-240VAC</b>	1
②	Connecting Cable (See Note.2)	<b>F03-21UP-CC</b>	1
③	Terminator (See Note.2)	<b>F03-20UP-TC</b>	1
④	Sensing Cable	<b>F03-16UP-C-2M</b>	2 m
		<b>F03-16UP-C-5M</b>	5 m
		<b>F03-16UP-C-10M</b>	10 m
		<b>F03-16UP-C-30M</b>	30 m
⑤	Junction Cable	<b>F03-21UP-JC</b>	1
⑥	Area Separator	<b>F03-20UP-AS</b>	1
-	Cable Stickers	<b>F03-25</b>	30 Stickers per bag

**Note:** 1. The Controller cannot be ordered separately.  
2. Included with the K7L-UP-FLK, but can be ordered separately.

### Basic configuration

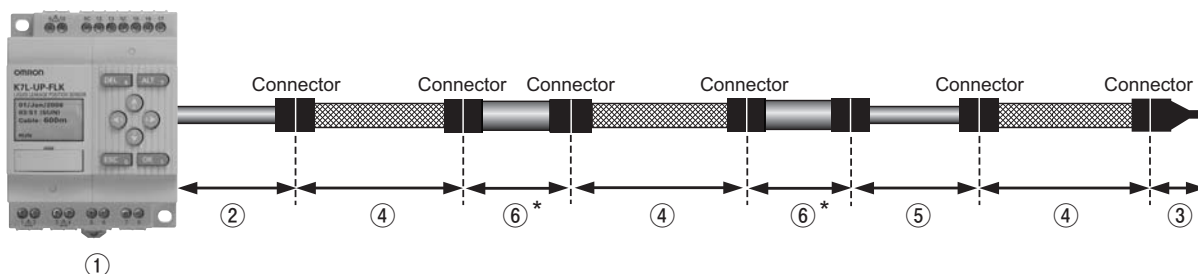

\* Area Separators can be used to enable accurately identifying the detection area in which a leak has occurred even when the leak occurs near an area boundary.

# K7L-UP-FLK

## Specifications

### Ratings

Item	Model	K7L-UP-FLK
Power supply voltage		100 to 240 VAC 50/60 Hz
Allowable voltage fluctuation range		Rated voltage 85 to 110 % (85 to 264 VAC)
Power consumption		10 VA max. (at maximum load)
Detection method		Inductive method
Operate resistance		50k, 100kΩ (selectable) Must operate below each sensitivity setting. *
Release resistance		350 kΩ min.
Current when electrodes are shorted		2 mA/AC max.
Wiring length		600 m max. (total of Sensing Cable, Connecting Cable, Junction Cable, Area Separator and general-purpose cable) This value is for completely insulated 600-V 3-conductor VCT cable of with a thickness of 0.75 mm <sup>2</sup> . No more than 10 Junction Cables can be used (20 m max.). Area Separators are calculated as 10 m each.
Disconnection detection function	Detection signal	10 VDC
	Detection time	45 s max.
	Recovery	After normal wiring
Output	Relay output	NO contacts × 2 outputs (leakage, disconnection, error output, and alarm output) Rated load 3A 250 VAC/30 VDC Resistive load 3A 250 VAC/30 VDC Inductive load 1A 250 VAC/30 VDC Service life Mechanical: 20 million outputs Electrical: 80,000 outputs Failure rate P value 24 VDC at 5 mA (reference value) Contact resistance 100 mΩ max. (default)
	4 to 20-mA output	Allowable load resistance 500 Ω max. Resolution Approx. 10,000 Error ± 1 %FS Steady state 4 mA At error detection 5 mA At disconnection detection 20 mA At leakage detection 6 + 12 × Leakage locations (m)/L (m) mA L: Set distance (default: 600 m)
Other functions		Shift, compensation, Area setting, Output setting, Output reset, Output test, Event log, Key protection, and Backlight ON-time setting
Ambient temperature	Operating	-10 to 55 °C (no icing or condensation)
	Storage	-25 to 65 °C (no icing or condensation)
Ambient humidity	Operating	25 to 85 %RH (no condensation)
	Storage	25 to 85 %RH (no condensation)
Altitude		2000 m max.
External color		Controller: Ivory
Mounting method		Surface mounting, DIN track mounting
Terminal block		Single-line terminal block (Use ferrules.)
Terminal block tightening torque		0.5 to 0.6 N•m
Degree of protection		IP20 (Panel-mounted)
Accessories		Connecting Cable, Terminator, Instruction manual

\*This product may not meet the performance that is described in catalog depending on liquid type that is detected. Please make sure to check and test before to buy it.

### Detectable chemical

Type	Name	Another Name	Chemical formula
Alcohol	Methanol	Methyl Alcohol	CH <sub>3</sub> OH
Acid	Hydrochloric Acid	---	HCl
	Sulfuric Acid		H <sub>2</sub> SO <sub>4</sub>
	Nitric Acid		HNO <sub>3</sub>
	Acetic Acid 98%		CH <sub>3</sub> COOH
	Phosphoric Acid		H <sub>3</sub> PO <sub>4</sub>
	Hydrofluoric Acid		HF
Alkali	Ammonia Solution	28% Ammonia Solution	NH <sub>3</sub>
	Sodium Hydroxide	Caustic Soda	NaOH
	Potassium Hydroxide	Caustic Potash	KOH
Other	Sodium Hypochlorite	---	NaClO
	Sodium Hydrogen Sulfite	Sodium Bisulfite	NaHSO <sub>3</sub>
	Hydrogen Peroxide	Hydrogen Peroxide 30%	H <sub>2</sub> O <sub>2</sub>

## Performance

Item	Model	K7L-UP-FLK													
<b>Leakage location accuracy *</b> (at an ambient temperature of 25 °C)		Total length 100 m max. $\pm 1$ m 101 to 600 m $\pm 1$ %													
<b>Response time</b>		45 s max. Startup time after power is turned ON: approx. 30 s													
<b>Display</b>		LCD, 12 columns $\times$ 4 lines (characters) with backlight Normal: Lit green Error: Flashing green Leakage detected: Lit red Disconnection detected: Flashing red													
<b>Insulation resistance</b>		20 M $\Omega$ max. (at 500 MVDC) Measured locations: Between all pairs of (1), (2), and (3), below. (1) Power supply terminals, (2) Relay output terminals, (3) All terminals together excluding (1) and (2)													
<b>Dielectric strength</b>		2,000 VAC 50/60 Hz 1 min. Measured locations: Same as for insulation resistance.													
<b>Vibration resistance</b>		Frequency: 10 to 55 Hz, Acceleration: 50 m/s <sup>2</sup> , Single amplitude: 0.35 mm, 10 sweeps of 5 min each in X, Y, and Z directions													
<b>Shock resistance</b>		130 m/s <sup>2</sup> , 3 times each for 3 axes in six directions													
<b>Weight (Sensor only)</b>		Approx. 185 g													
<b>Memory protection</b>		EEPROM (non-volatile memory)													
<b>Installation environment</b>		Installation Category II, Pollution Degree 2													
<b>Safety standards</b>		UL508, CAN/CSA-C22.2 No.14 (pending) EN61010-1 (IEC61010-1)													
<b>EMC</b>	<b>EMI EN61326-1 (Industrial applications)</b>	Electromagnetic radiation interference: CISPR11 classA Noise terminal voltage: CISPR11 classA													
	<b>EMS EN61326-1 (Industrial applications)</b>	<table border="0"> <tr> <td>Electrostatic discharge immunity</td> <td>EN61000-4-2 : 4 kV (contact) : 8 kV (in air)</td> </tr> <tr> <td>Radiated electromagnetic field immunity</td> <td>EN61000-4-3 : 10 V/m (80 MHz to 1 GHz) : 3 V/m (1.4 to 2 GHz) : 1 V/m (2.0 to 2.7 GHz)</td> </tr> <tr> <td>Fast transient/burst immunity</td> <td>EN61000-4-4 : 2 kV (power line) : 1 kV (I/O signal lines)</td> </tr> <tr> <td>Surge immunity</td> <td>EN61000-4-5 : 1 kV between lines (power line) : 2 kV between grounds (power line) : 1 kV between grounds (sensor line)</td> </tr> <tr> <td>Conducted noise immunity</td> <td>EN61000-4-6 : 3V (0.15 to 80 MHz)</td> </tr> <tr> <td>Power frequency magnetic immunity</td> <td>EN61000-4-8 : 30A/m</td> </tr> <tr> <td>Voltage dip and interruption immunity</td> <td>EN61000-4-11 : 1 cycle 0% (rated voltage) : 10/12 cycle 40% (rated voltage) : 25/30 cycle 70% (rated voltage)</td> </tr> </table>	Electrostatic discharge immunity	EN61000-4-2 : 4 kV (contact) : 8 kV (in air)	Radiated electromagnetic field immunity	EN61000-4-3 : 10 V/m (80 MHz to 1 GHz) : 3 V/m (1.4 to 2 GHz) : 1 V/m (2.0 to 2.7 GHz)	Fast transient/burst immunity	EN61000-4-4 : 2 kV (power line) : 1 kV (I/O signal lines)	Surge immunity	EN61000-4-5 : 1 kV between lines (power line) : 2 kV between grounds (power line) : 1 kV between grounds (sensor line)	Conducted noise immunity	EN61000-4-6 : 3V (0.15 to 80 MHz)	Power frequency magnetic immunity	EN61000-4-8 : 30A/m	Voltage dip and interruption immunity
Electrostatic discharge immunity	EN61000-4-2 : 4 kV (contact) : 8 kV (in air)														
Radiated electromagnetic field immunity	EN61000-4-3 : 10 V/m (80 MHz to 1 GHz) : 3 V/m (1.4 to 2 GHz) : 1 V/m (2.0 to 2.7 GHz)														
Fast transient/burst immunity	EN61000-4-4 : 2 kV (power line) : 1 kV (I/O signal lines)														
Surge immunity	EN61000-4-5 : 1 kV between lines (power line) : 2 kV between grounds (power line) : 1 kV between grounds (sensor line)														
Conducted noise immunity	EN61000-4-6 : 3V (0.15 to 80 MHz)														
Power frequency magnetic immunity	EN61000-4-8 : 30A/m														
Voltage dip and interruption immunity	EN61000-4-11 : 1 cycle 0% (rated voltage) : 10/12 cycle 40% (rated voltage) : 25/30 cycle 70% (rated voltage)														

\* This leakage position accuracy is for main unit (K7L-UP). Sensing cable also has errors separate from the accuracy described.

## Communications Performance


Communications protocol	CompoWay/F	Modbus (RTU mode)
Transmission path connections	Multi-point (32 nodes max. including Master)	
Communications method	RS-485 (two-wire method, half-duplex)	
Synchronization method	Start-stop synchronization	
Baud rate *	4800/9600/19200/38400 bps	
Transmission code	ASCII	Binary
Data length *	7/8 bits	8 bits
Stop bit length *	1/2 bits	Set automatically (no setting) depending on the vertical parity setting. Without vertical parity: 2 bit With vertical parity: 1 bit
Error detection	Vertical parity (none, even odd) BCC (Block Check Character)	Vertical parity (none, even odd) CRC-16 (Cyclical Redundancy Check)
Wait time	00 to 99 ms (Default: 20 ms)	

\*Baud rate, data length, stop bit length and vertical parity can be separately set.

This catalog is intended only as a guide to selecting a product. For details on precautions when using the product, be sure to read the [K7L-UP-FLK Liquid Leakage Position Sensor User's Manual] (Cat. No. H161).  
The manual can be downloaded from the following website.  
OMRON Industrial website: <http://www.ia.omron.com/>

## Part Names and Functions

## Operation Area

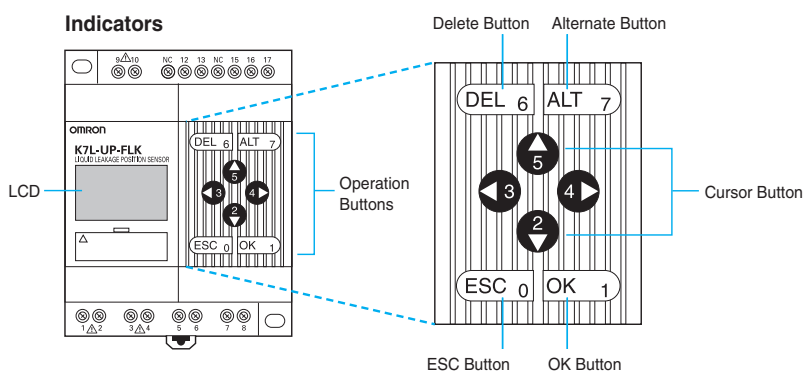

Button	Name	Function	
		Menu selection	Parameter setting
	DEL Button	—	Deletes the characters or setting.
	ALT Button	—	Use in combination with a button.
	Up Cursor Button	Moves the selected item up.	Moves the selected item up. Moves the number or character forward.
	Down Cursor Button	Moves the selected item down.	Moves the selected item down. Moves the number or character backward.
	Left Cursor Button	—	Moves the selected item to the left.
	Right Cursor Button	—	Moves the selected item to the Right.
	ESC Button	Returns to the previous screen.	Discards the setting and returns to the previous operation.
	OK Button	Enters the selected item.	Enters the setting.


**Note:** The above operations are provided as examples. For details, read the K7L-UP-FLK Liquid Leakage position Sensor User's Manual (Cat. No. H161).

The manual can be downloaded from the following website  
OMRON Industrial website <http://www.ia.omron.com/>

# K7L-UP-FLK

## Connections

### Overall Terminal Arrangement

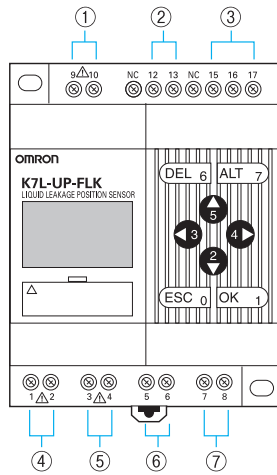

- ① Power supply terminals
- ② External reset input terminals
- ③ Connecting cable terminals
- ④ Alarm output contact terminals
- ⑤ Leakage/disconnection output contacts
- ⑥ RS-485 communications terminals
- ⑦ Linear outputs terminals (4 to 20 mA)

#### Top Row

9	10	NC	12	13	NC	15	16	17
---	----	----	----	----	----	----	----	----

#### Bottom Row

1	2	3	4	5	6	7	8
---	---	---	---	---	---	---	---


Bottom Row		Top Row		
Terminals No.	Name	Terminals No.	Name	
1	Alarm output contacts	9	Power supply	
2	Alarm output contacts	10	Power supply	
3	Leakage/disconnection output contacts	NC	Free terminal *	
4	Leakage/disconnection output contacts	12	External reset	
5	RS-485 B (+)	13	External reset	
6	RS-485 A (-)	NC	Free terminal *	
7	Linear outputs (+)	15	Detect wire (Red)	
8	Linear outputs (-)	16	Resistance wire (White)	Connecting cable
		17	Signal wire (Black)	

\*Do not wire anything to free terminals.

### Specific Terminal Arrangements


#### External Reset

Use no-voltage contacts or NPN open collector.

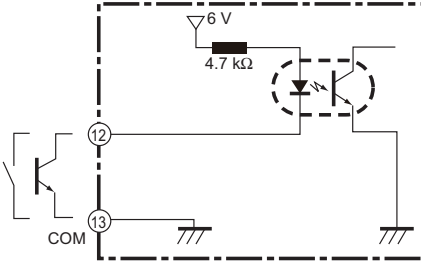


#### 4 to 20-mA Output

The load capacity is 500 Ω max.

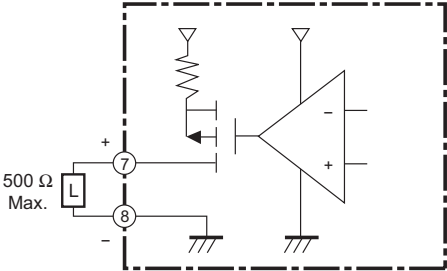


#### Relay Output

Connect the loads between terminals (1) and (2), and between (3) and (4).

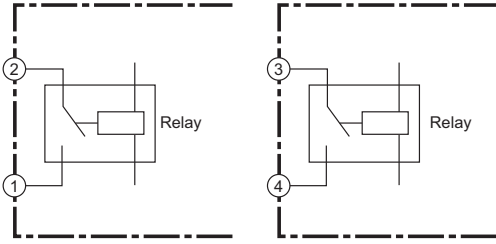

Note: The external reset and 4 to 20-mA output commons are internally isolated.

### Internal Block Diagram

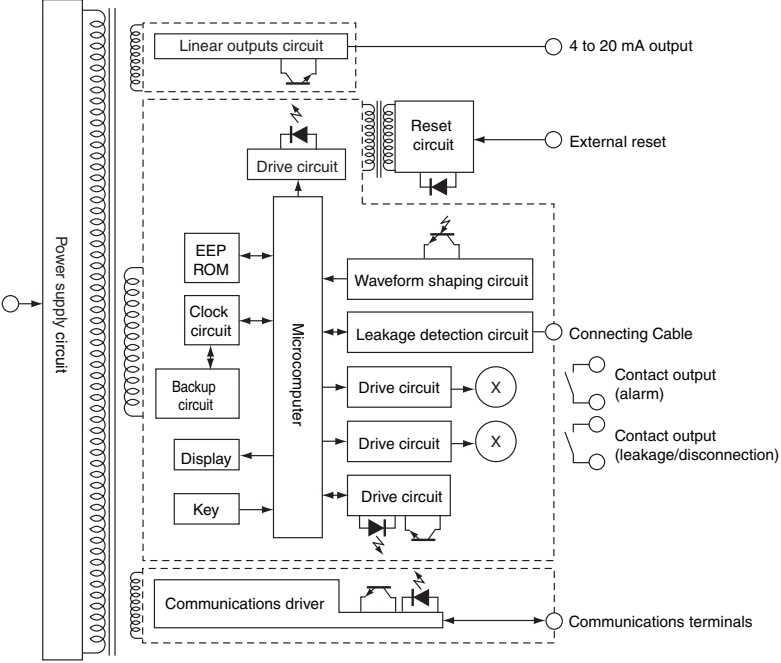

# K7L-UP-FLK

## Main Functions

### Liquid Leakage Monitoring

#### Detection of Changes in Liquid Leakage

- Extent of Leakage  
Any spreading of leakage from the current location is detected.
- Detection of Second Leakage location  
Leakage at a separate location from the current leakage location is detected.

#### Up to 600 m of Cable for a Single Sensor

A maximum length of 600 m is possible by combining Sensing Cables with other cables. When Cables are connected, the length of Sensing Cable is automatically displayed. The length of the F03-21UP-JC Junction Cables is not included in the displayed cable length. The distance displayed for each Area Separator is equivalent to 10 m of Sensing Cable.

#### A Selection of Detection Sensitivities

Two levels of leakage detection can be selected.


#### Disconnection Detection

Cable disconnections from the Controller to the Terminator are detected.

### Input


#### Shift Function

This function changes the 0-m position for the Sensing Cable. When there is a distance between the Controller and the location where the leakage is detected, the display can be made easier to understand by changing any distance to 0 m.

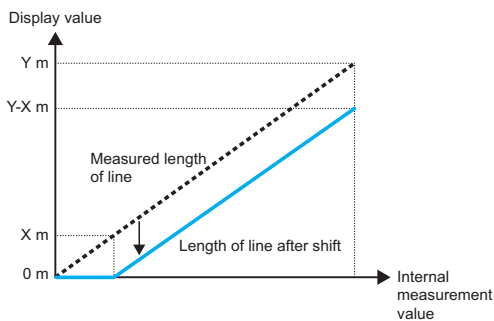

#### Compensation Function

This function changes the length of the Sensing Cable to any value. When there is a discrepancy between the actual length and the measured length, this value can be revised to any value for compensation.

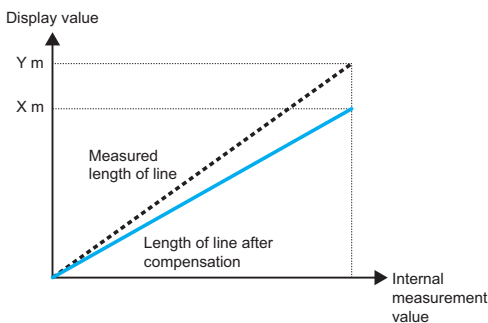

### Output

#### Relay Output

Can be set to normally open or normally closed.

#### Output Reset

Any of three patterns can be selected for the output reset method.

#### RS-485 Communications

Either CompoWay/F or Modbus can be selected as the communications protocol.

#### Linear Output

4 to 20-mA output can be selected.

### Other

#### Display Language

Either English or Japanese can be selected.

#### Event Log

Timestamps for up to 20 events and leakage occurrences can be retained.

#### Output Testing

Testing can be conducted without connecting the Sensing Cable.

#### Key Protection

Unintended setting changes can be prevented.

#### Backlight ON Time


The backlight can be set to always remain ON or to turn OFF after a specified time.

#### Area Settings

Laek positions in meters can be divided into up to 20 areas. F03-20UP-AS Area Separators can be used to enable accurately identifying the detection area in which a leak has occurred even when the leak occurs near an area boundary.



## Cable Connection Example

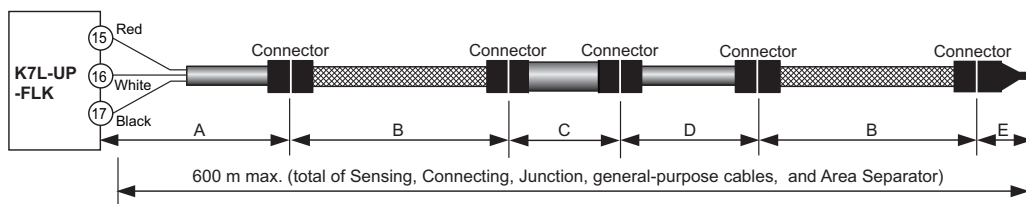

	Product name	Model
A	Connecting Cable	F03-21UP-CC
B	Sensing Cable	F03-16UP-C-□M *1
C	Area Separator *2	F03-20UP-AS
D	Junction Cable *3	F03-21UP-JC
E	Terminator	F03-20UP-TC


\*1. The blank (□) in the model number represents 2, 5, 10, or 30.

\*2. Area Separators are calculated as 10 m each.

\*3. No more than 10 Junction Cables can be used (20 m max.).

## Surges


In an environment where surges can be expected, use the Sensor in conjunction with a 61F-03B Surge Suppressor Unit. Install the Surge Suppressor Unit near the Controller. If it is installed too far from the Controller, the surge suppression may not be sufficient.

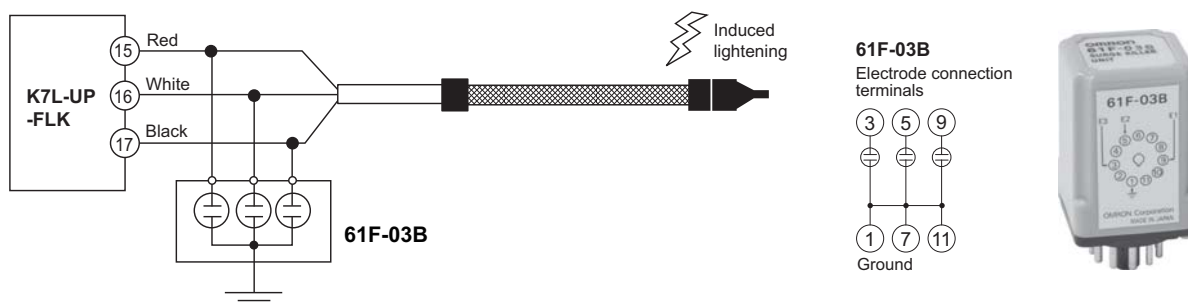

## Dimensions

(Unit: mm)

### Controller

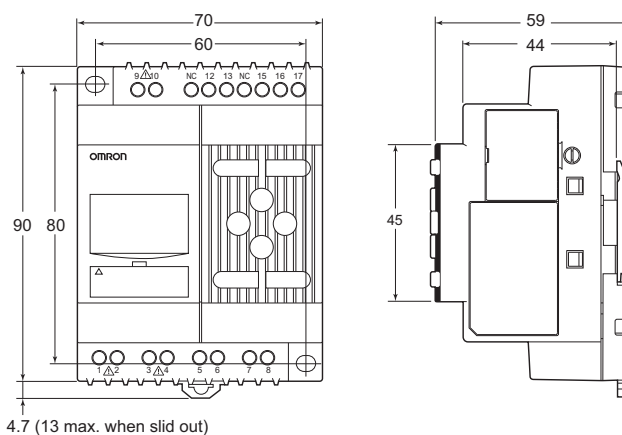


## F03-□□UP

## F03-□□UP

### Sensing Cable


F03-16UP-C-□M

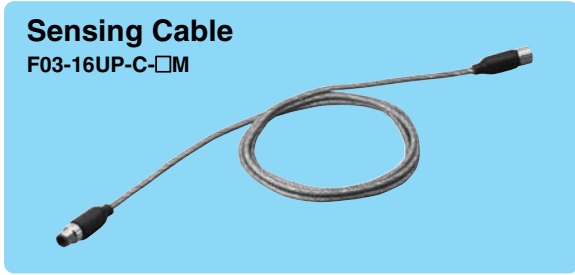

- Made of fluoro-resin for superior resistance to chemicals.
- Flexible cables make wiring easy.
- There is little out gas, enabling worry-free use in a clean room.

### Structure and Dimensions

(Unit: mm)

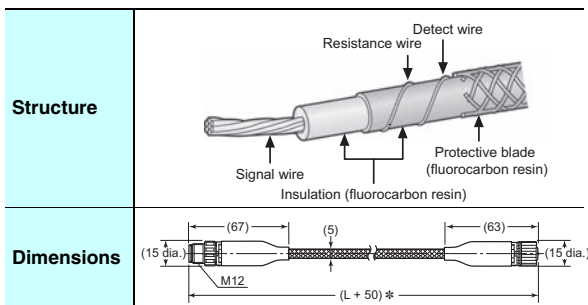

\* L: 2m, 5m, 10m, 30m

### Specifications

<b>Number of electrodes</b>	3	
<b>Cable materials</b>	<b>Signal wire</b>	Tin-plated annealed copper
	<b>Resistance wire</b>	Kernalloy
	<b>Detect wire</b>	Nickel
	<b>Insulation coating</b>	Fluoro-resin
<b>Connector materials</b>	<b>Metallic parts</b>	Brass with nickel plating
	<b>Resin parts</b>	Polyolefine resin
<b>Insulation resistance</b>		10 MΩ min.
<b>Ambient temperature</b>		-10 to 55 °C
<b>Ambient humidity</b>		25 to 85 %
<b>Weight (2m)</b>		Approx. 80 g

**Note:** The blank -□M suffix in the model number indicates that 2, 5, 10, or 30 m can be selected.

### Sensing Cable Chemical Resistance

Liquid	Corrosion resistance
Water	A
Ammonia	B
Hydrochloric acid	C
Sulfuric acid	B
Phosphoric acid	B
Caustic soda	B
Sodium sulfite	B
Sodium hypochlorite	C
Hydrogen fluoride	C


A: Not affected at all or only very slightly affected.

B: Slightly affected but, depending on the conditions, sufficient for use.

C: Affected but may still be used. (Replace the Sensing Band immediately after detection.)

### Connecting Cable


F03-21UP-CC

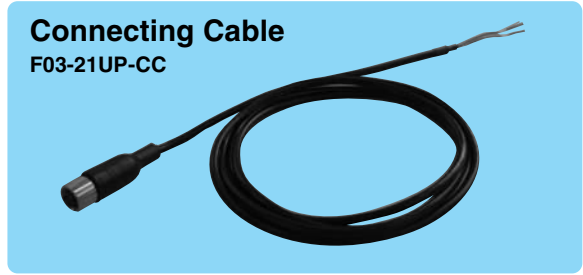

- Cable for connecting the Controller and Sensing Cable.

### Dimensions


(Unit: mm)

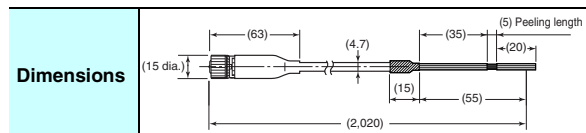

**Note:** For recommended ferrules, refer to page 12.

### Specifications


<b>Number of electrodes</b>	3	
<b>Cable materials</b>	<b>Signal wire</b>	Tin-plated annealed copper
	<b>Resistance wire</b>	Tin-plated annealed copper
	<b>Detect wire</b>	Tin-plated annealed copper
	<b>Insulation coating</b>	PVC
<b>Connector materials</b>	<b>Metallic parts</b>	Brass with nickel plating
	<b>Resin parts</b>	Polyolefine resin
<b>Insulation resistance</b>		10 MΩ min.
<b>Ambient temperature</b>		-10 to 55 °C
<b>Ambient humidity</b>		25 to 85 %
<b>Weight</b>		Approx. 82 g

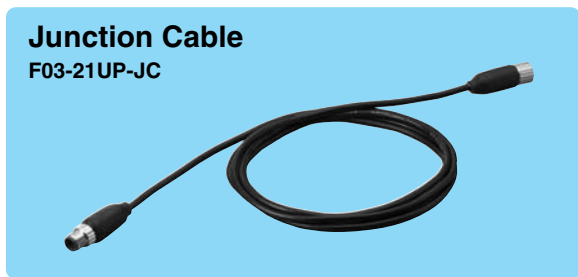

**Junction Cable**  
F03-21UP-JC

- Junction Cable for connecting between Sensing Cables.

**Dimensions** (Unit: mm)

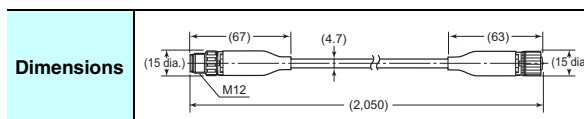


**Note:** Cut the middle of cable and connect it with commercial-triplex cable when you extend the junction cable.

**Specifications**

<b>Number of electrodes</b>		3
<b>Cable materials</b>	<b>Insulation coating</b>	PVC
	<b>Connector materials</b>	
<b>Connector materials</b>	<b>Metallic parts</b>	Brass with nickel plating
	<b>Resin parts</b>	Polyolefine resin
<b>Insulation resistance</b>		10 MΩ min.
<b>Ambient temperature</b>		-10 to 55 °C
<b>Ambient humidity</b>		25 to 85 %
<b>Weight</b>		Approx. 100 g

**Cable Sticker**

F03-25

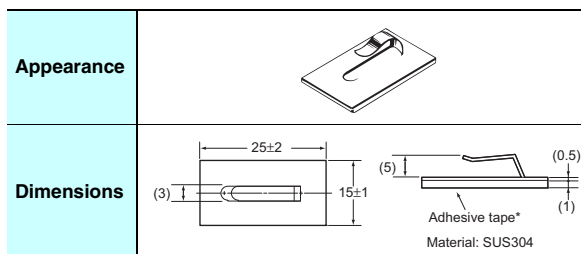

< **Area Separator** >


Leak positions in meters can be divided into up to 20 areas. F03-20UP-AS Area Separators can be used to enable accurately identifying the detection area in which a leak has occurred even when the leak occurs near an area boundary.



**Terminator**  
F03-20UP-TC


- This is an end connector for connecting to the end of Sensing Cable.

**Dimensions** (Unit: mm)

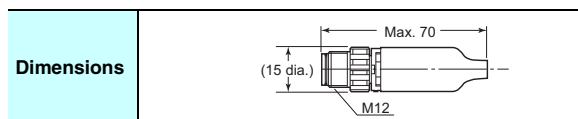

**Specifications**


<b>Number of electrodes</b>		3
<b>Connector materials</b>	<b>Metallic parts</b>	Brass with nickel plating
	<b>Resin parts</b>	Polyolefine resin
<b>Ambient temperature</b>		-10 to 55 °C
<b>Ambient humidity</b>		25 to 85 %
<b>Weight</b>		Approx. 17 g

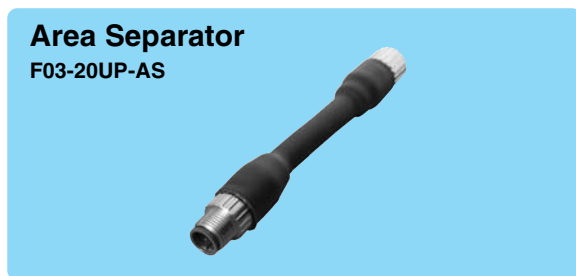

**Area Separator**  
F03-20UP-AS

- Connector for dividing the areas.
- Connecting to area boundary.

**Dimensions** (Unit: mm)

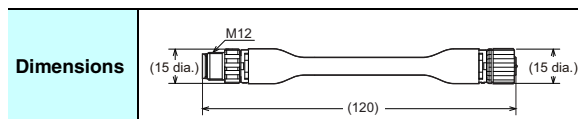

**Specifications**

<b>Number of electrodes</b>		3
<b>Connector materials</b>	<b>Metallic parts</b>	Brass with nickel plating
	<b>Resin parts</b>	Polyolefine resin
<b>Insulation resistance</b>		10 MΩ min.
<b>Ambient temperature</b>		-10 to 55 °C
<b>Ambient humidity</b>		25 to 85 %
<b>Weight</b>		Approx. 32 g

# K7L-UP-FLK

## Precautions

### ⚠ Caution

Tighten the terminal screws to the recommended torque of 0.5 to 0.6 N·m. Failure to do so may occasionally cause physical damage due to fire.



Do not use the product in an environment with flammable or explosive gas. Doing so may occasionally cause minor or moderate personal injury or physical damage due to explosion.



Do not touch the terminals while the power is ON. Doing so may occasionally cause electric shock.



Do not open the top or side covers of the case or remove masking seals. Doing so may occasionally cause electric shock or physical damage to the product.



Do not disassemble, repair, or modify the product. Doing so may occasionally cause electric shock, minor injury, fire, or damage to the product.



### Safety Precautions

- Do not use, store, or transport the product in the following environments.
  - Locations exposed to direct sunlight
  - Outdoor locations or locations exposed to wind or rain
  - Locations with temperatures or humidity outside of the specified range
  - Locations subject to condensation
  - Locations subject to sudden changes in temperature or humidity
  - Locations subject to strong vibration or shock
  - Locations where the product will be exposed to water spray, oil, or saltwater
  - Locations exposed to corrosive gas (particularly sulfurous acid gas, ammonia gas, etc.)
  - Locations with excessive dust and dirt
- When mounting to a DIN Track, make sure that there are no loose screws and that the product is securely mounted. If screws come loose, the DIN Track, the product, or wiring may be shaken loose due to vibration or shock.
- Use a DIN Track that is 35 mm in width (OMRON model number: PFP-50N/-100N).
- When surface mounting, use M4 screws and tighten the screws to the specified torque of 1.03 N·m max.
- Check to make sure there are no mistakes in the specifications or wiring before turning ON the power.
- Make sure that the power supply voltage and the load are within the specifications and ratings.
- Use the following crimp terminals for wiring.  
Phoenix Contact
  - Connecting Cable: AI0.25-6BU (AWG24)
  - Other: AI0.34-8TQ (AWG22)
  - AI0.5-8WH (AWG20)
  - AI0.75-8GY (AWG18)
- Do not pull on the cables.
- Conduct operation tests before using the product.
- Install an external switch or circuit breaker that complies with applicable IEC 60947-1 and IEC 60947-3 requirements, and label it clearly so that the operator can quickly turn OFF the power.
- Do not use the product in locations subject to static electricity or electric fields.
- Install the product as far away as possible from devices that generate strong high frequency or surges.
- To prevent inductive noise, separate the wiring for the product from high-voltage or high-current power lines. In addition, do not route the wiring for the product in parallel with or bundled with

power lines. Using separate conduits or ducts and shielded cables can also be effective.

- Do not allow pieces of metal, wire clippings, or fine metallic shavings or filings from installation to enter the product.
- Do not install the product near heat-producing devices (such as devices with coils or windings).
- Do not connect anything to unused terminals.
- Firmly secure the connectors for Connecting Cables, Junction Cables, Area Separators, Sensing Cables, and Terminators.
- Do not clean the product with paint thinners. Use commercial alcohol.
- Dispose of the product as industrial waste.
- Be sure to touch the unit after touching the contacted metal and discharging static electricity of the human body.

### Precautions for Correct Use

- Use the following OMRON products for leakage detection.
  - Sensing Cable: F03-16UP-C-□M
  - Connecting Cable: F03-21UP-CC
  - Junction Cable: F03-21UP-JC
  - Area Separator: F03-20UP-AS
  - Terminator: F03-20UP-TC
- After leakage has been detected, wipe the fluid from the Sensing Cable. If the Sensing Cable deteriorates despite being wiped off, then replace it.
- Do not subject Sensing Cables, Connecting Cables, Junction Cables, Area Separators, or Terminators to vibration or shock.
- When laying cable in a place where people pass through, use a protective duct.
- Do not install the connectors on the Sensing Cables or the Connecting Cables, Junction Cables, Area Separators, or Terminators in the areas where leaks are being detected. If chemical solution adheres to any of these, replace them.
- Do not install the Sensing Cable where it will be pressed against a metal edge.
- Warm-up for 15 minutes min. after turning on the power.
- Do not bend or tightly tie up extra Sensing Cable.
- Be sure that you understand the manual before making device settings. When short-circuiting the sensing line, use a commercially available metal brush for 45 seconds min.
- This product detects changes in the electrical resistance of liquids. The performance of the product specified in this document may not be obtained for some types of liquids. Always perform tests in advance before purchasing the product to confirm applicability.

### Application Precautions

You must allow sufficient leeway in ratings and performance, and provide proper fail-safe or other safety measures when using these products in any of the following applications. Be sure also to consult with your OMRON representative before actually attempting any of these applications.

- Applications under conditions or environments not specified in user documentation
- Applications for nuclear control systems, railroad systems, aviation systems, vehicles, combustion systems, medical equipment, amusement machines, or safety equipment
- Applications that may have a serious influence on lives and property and thus require particularly attention to safety





# Terms and Conditions of Sale

- Offer; Acceptance.** These terms and conditions (these "Terms") are deemed part of all quotes, agreements, purchase orders, acknowledgments, price lists, catalogs, manuals, brochures and other documents, whether electronic or in writing, relating to the sale of products or services (collectively, the "Products") by Omron Electronics LLC and its subsidiary companies ("Omron"). Omron objects to any terms or conditions proposed in Buyer's purchase order or other documents which are inconsistent with, or in addition to, these Terms.
- Prices; Payment Terms.** All prices stated are current, subject to change without notice by Omron. Omron reserves the right to increase or decrease prices on any unshipped portions of outstanding orders. Payments for Products are due net 30 days unless otherwise stated in the invoice.
- Discounts.** Cash discounts, if any, will apply only on the net amount of invoices sent to Buyer after deducting transportation charges, taxes and duties, and will be allowed only if (i) the invoice is paid according to Omron's payment terms and (ii) Buyer has no past due amounts.
- Interest.** Omron, at its option, may charge Buyer 1-1/2% interest per month or the maximum legal rate, whichever is less, on any balance not paid within the stated terms.
- Orders.** Omron will accept no order less than \$200 net billing.
- Governmental Approvals.** Buyer shall be responsible for, and shall bear all costs involved in, obtaining any government approvals required for the importation or sale of the Products.
- Taxes.** All taxes, duties and other governmental charges (other than general real property and income taxes), including any interest or penalties thereon, imposed directly or indirectly on Omron or required to be collected directly or indirectly by Omron for the manufacture, production, sale, delivery, importation, consumption or use of the Products sold hereunder (including customs duties and sales, excise, use, turnover and license taxes) shall be charged to and remitted by Buyer to Omron.
- Financial.** If the financial position of Buyer at any time becomes unsatisfactory to Omron, Omron reserves the right to stop shipments or require satisfactory security or payment in advance. If Buyer fails to make payment or otherwise comply with these Terms or any related agreement, Omron may (without liability and in addition to other remedies) cancel any unshipped portion of Products sold hereunder and stop any Products in transit until Buyer pays all amounts, including amounts payable hereunder, whether or not then due, which are owing to it by Buyer. Buyer shall in any event remain liable for all unpaid accounts.
- Cancellation; Etc.** Orders are not subject to rescheduling or cancellation unless Buyer indemnifies Omron against all related costs or expenses.
- Force Majeure.** Omron shall not be liable for any delay or failure in delivery resulting from causes beyond its control, including earthquakes, fires, floods, strikes or other labor disputes, shortage of labor or materials, accidents to machinery, acts of sabotage, riots, delay in or lack of transportation or the requirements of any government authority.
- Shipping; Delivery.** Unless otherwise expressly agreed in writing by Omron:
  - Shipments shall be by a carrier selected by Omron; Omron will not drop ship except in "break down" situations.
  - Such carrier shall act as the agent of Buyer and delivery to such carrier shall constitute delivery to Buyer;
  - All sales and shipments of Products shall be FOB shipping point (unless otherwise stated in writing by Omron), at which point title and risk of loss shall pass from Omron to Buyer; provided that Omron shall retain a security interest in the Products until the full purchase price is paid;
  - Delivery and shipping dates are estimates only; and
  - Omron will package Products as it deems proper for protection against normal handling and extra charges apply to special conditions.
- Claims.** Any claim by Buyer against Omron for shortage or damage to the Products occurring before delivery to the carrier must be presented in writing to Omron within 30 days of receipt of shipment and include the original transportation bill signed by the carrier noting that the carrier received the Products from Omron in the condition claimed.
- Warranties.** (a) **Exclusive Warranty.** Omron's exclusive warranty is that the Products will be free from defects in materials and workmanship for a period of twelve months from the date of sale by Omron (or such other period expressed in writing by Omron). Omron disclaims all other warranties, express or implied. (b) **Limitations.** OMRON MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, ABOUT NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OF THE PRODUCTS. BUYER ACKNOWLEDGES THAT IT ALONE HAS DETERMINED THAT THE PRODUCTS WILL SUITABLY MEET THE REQUIREMENTS OF THEIR INTENDED USE. Omron further disclaims all warranties and responsibility of any type for claims or expenses based on infringement by the Products or otherwise of any intellectual property right. (c) **Buyer Remedy.** Omron's sole obligation hereunder shall be, at Omron's election, to (i) replace (in the form originally shipped with Buyer responsible for labor charges for removal or replacement thereof) the non-complying Product, (ii) repair the non-complying Product, or (iii) repay or credit Buyer an amount equal to the purchase price of the non-complying Product; provided that in no event shall Omron be responsible for warranty, repair, indemnity or any other claims or expenses regarding the Products unless Omron's analysis confirms that the Products were properly handled, stored, installed and maintained and not subject to contamination, abuse, misuse or inappropriate modification. Return of any Products by Buyer must be approved in writing by Omron before shipment. Omron Companies shall not be liable for the suitability or unsuitability or the results from the use of Products in combination with any electrical or electronic components, circuits, system assemblies or any other materials or substances or environments. Any advice, recommendations or information given orally or in writing, are not to be construed as an amendment or addition to the above warranty. See <http://www.omron247.com> or contact your Omron representative for published information.
- Limitation on Liability; Etc.** OMRON COMPANIES SHALL NOT BE LIABLE FOR SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS OR PRODUCTION OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCTS, WHETHER SUCH CLAIM IS BASED IN CONTRACT, WARRANTY, NEGLIGENCE OR STRICT LIABILITY. Further, in no event shall liability of Omron Companies exceed the individual price of the Product on which liability is asserted.
- Indemnities.** Buyer shall indemnify and hold harmless Omron Companies and their employees from and against all liabilities, losses, claims, costs and expenses (including attorney's fees and expenses) related to any claim, investigation, litigation or proceeding (whether or not Omron is a party) which arises or is alleged to arise from Buyer's acts or omissions under these Terms or in any way with respect to the Products. Without limiting the foregoing, Buyer (at its own expense) shall indemnify and hold harmless Omron and defend or settle any action brought against such Companies to the extent based on a claim that any Product made to Buyer specifications infringed intellectual property rights of another party.
- Property; Confidentiality.** Any intellectual property in the Products is the exclusive property of Omron Companies and Buyer shall not attempt to duplicate it in any way without the written permission of Omron. Notwithstanding any charges to Buyer for engineering or tooling, all engineering and tooling shall remain the exclusive property of Omron. All information and materials supplied by Omron to Buyer relating to the Products are confidential and proprietary, and Buyer shall limit distribution thereof to its trusted employees and strictly prevent disclosure to any third party.
- Export Controls.** Buyer shall comply with all applicable laws, regulations and licenses regarding (i) export of products or information; (ii) sale of products to "forbidden" or other proscribed persons; and (iii) disclosure to non-citizens of regulated technology or information.
- Miscellaneous.** (a) **Waiver.** No failure or delay by Omron in exercising any right and no course of dealing between Buyer and Omron shall operate as a waiver of rights by Omron. (b) **Assignment.** Buyer may not assign its rights hereunder without Omron's written consent. (c) **Law.** These Terms are governed by the law of the jurisdiction of the home office of the Omron company from which Buyer is purchasing the Products (without regard to conflict of law principles). (d) **Amendment.** These Terms constitute the entire agreement between Buyer and Omron relating to the Products, and no provision may be changed or waived unless in writing signed by the parties. (e) **Severability.** If any provision hereof is rendered ineffective or invalid, such provision shall not invalidate any other provision. (f) **Setoff.** Buyer shall have no right to set off any amounts against the amount owing in respect of this invoice. (g) **Definitions.** As used herein, "including" means "including without limitation"; and "Omron Companies" (or similar words) mean Omron Corporation and any direct or indirect subsidiary or affiliate thereof.

## Certain Precautions on Specifications and Use

- Suitability of Use.** Omron Companies shall not be responsible for conformity with any standards, codes or regulations which apply to the combination of the Product in the Buyer's application or use of the Product. At Buyer's request, Omron will provide applicable third party certification documents identifying ratings and limitations of use which apply to the Product. This information by itself is not sufficient for a complete determination of the suitability of the Product in combination with the end product, machine, system, or other application or use. Buyer shall be solely responsible for determining appropriateness of the particular Product with respect to Buyer's application, product or system. Buyer shall take application responsibility in all cases but the following is a non-exhaustive list of applications for which particular attention must be given:
  - Outdoor use, uses involving potential chemical contamination or electrical interference, or conditions or uses not described in this document.
  - Use in consumer products or any use in significant quantities.
  - Energy control systems, combustion systems, railroad systems, aviation systems, medical equipment, amusement machines, vehicles, safety equipment, and installations subject to separate industry or government regulations.
  - Systems, machines and equipment that could present a risk to life or property. Please know and observe all prohibitions of use applicable to this Product.

NEVER USE THE PRODUCT FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY OR IN LARGE QUANTITIES WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO
- ADDRESS THE RISKS, AND THAT THE OMRON'S PRODUCT IS PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.
- Programmable Products.** Omron Companies shall not be responsible for the user's programming of a programmable Product, or any consequence thereof.
- Performance Data.** Data presented in Omron Company websites, catalogs and other materials is provided as a guide for the user in determining suitability and does not constitute a warranty. It may represent the result of Omron's test conditions, and the user must correlate it to actual application requirements. Actual performance is subject to the Omron's Warranty and Limitations of Liability.
- Change in Specifications.** Product specifications and accessories may be changed at any time based on improvements and other reasons. It is our practice to change part numbers when published ratings or features are changed, or when significant construction changes are made. However, some specifications of the Product may be changed without any notice. When in doubt, special part numbers may be assigned to fix or establish key specifications for your application. Please consult with your Omron's representative at any time to confirm actual specifications of purchased Product.
- Errors and Omissions.** Information presented by Omron Companies has been checked and is believed to be accurate; however, no responsibility is assumed for clerical, typographical or proofreading errors or omissions.



**OMRON ELECTRONICS LLC • THE AMERICAS HEADQUARTERS** • Schaumburg, IL USA • 847.843.7900 • 800.556.6766 • [www.omron247.com](http://www.omron247.com)

**OMRON CANADA, INC. • HEAD OFFICE**

Toronto, ON, Canada • 416.286.6465 • 866.986.6766  
[www.omron247.com](http://www.omron247.com)

**OMRON ELETRÔNICA DO BRASIL LTDA • HEAD OFFICE**

São Paulo, SP, Brasil • 55.11.2101.6300 • [www.omron.com.br](http://www.omron.com.br)

**OMRON ELECTRONICS MEXICO SA DE CV • HEAD OFFICE**

Apodaca, N.L. • 52.811.156.99.10 • 001.800.556.6766 • [mela@omron.com](mailto:mela@omron.com)

**OMRON ARGENTINA • SALES OFFICE**

Cono Sur • 54.11.4783.5300

**OMRON CHILE • SALES OFFICE**

Santiago • 56.9.9917.3920

**OTHER OMRON LATIN AMERICA SALES**

54.11.4783.5300

**OMRON EUROPE B.V.** Wegalaan 67-69, NL-2132 JD, Hoofddorp, The Netherlands. Tel: +31 (0) 23 568 13 00 Fax: +31 (0) 23 568 13 88 [www.industrial.omron.eu](http://www.industrial.omron.eu)