

MA Series

Operating Instructions for MA-14 & MA-34 Safety Switches

KEEP THIS GUIDE FOR FUTURE REFERENCE

This information is designed to help suitably qualified personnel install and operate Omron Scientific Technologies, Inc. safety switch equipment.

Before using this product, read this guide thoroughly along with any relevant European and/or National Standards e.g. Machinery Directive 89/392/EEC and it's Amendments, Provision and Use of Work Equipment Regulations.

Further information can be obtained from
Omron Scientific Technologies, Inc.

Description

The MA-14 & MA-34 safety switches are magnetically operated non-contact safety switch for use in machine guarding applications.

The non-contact operation makes these switches easy to install and tolerant to misalignment, providing a simple and reliable solution to machine guard interlocking.

The MA-14 is manufactured in a robust ABS housing and the MA-34 is manufactured in a 316 Grade Stainless Steel housing. Both switch and actuator are fully sealed to IP67 and suitable for use in wet or dusty environments

With correct installation, these safety switches comply with the guidelines given in EN1088.

Operation

When the safety switch and actuator are within the specified operating range, (See table on page 3 for switching distances) the **Safety Contact** will be closed and the **Auxiliary Contact** will be open.

When the actuator moves out of the operating range, the **Safety Contact** will open. The **Auxiliary Contact** will close for indication.

The MA-14 & MA-34 safety switch and actuator are designed to approach each other from most angles. When the switch is closed the targets on the printed face of the switch must be aligned.

Applications

Interlocked guards where door locking is not required.
Food and Beverage packing/filling systems
Dairy
Pharmaceutical
Paper Industry
Can Forming and Filling, (Aluminum, Steel, Plastic)
Semiconductor Manufacture/Assembly.

MA-14

MA-34



Approvals

CE	Complies with the relevant sections of the CE marking directive.
UL	UL 508, Industrial Control Equipment

EUROPEAN DIRECTIVES

Machinery Directive 98/37/EC
Low Voltage Directive 73/23/EC
Electromagnetic Compatibility Directive 89/336/EC

EUROPEAN STANDARDS


EN292	Safety of Machinery Basic concepts, general principles for design.
EN 60204	Safety of Machinery Electrical equipment of machines.
EN 954-1	Safety of Machinery Safety related parts of controls systems
EN 1088	Interlocking devices associated with guards.
EN 60947-5-3	Safety of Machinery Specification for low voltage switchgear and control gear.

Declaration of Conformity

A Declaration of Conformity can be obtained from the Omron Scientific Technologies, Inc. web Site: www.sti.com

Mounting

The MA-14 & MA-34 safety switches can approach each other from most angles. When the guard is closed the targets on the printed face of the switch and actuator must be aligned.

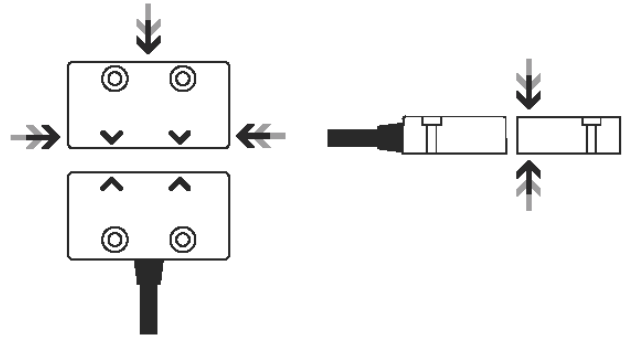


Mount the switch on to the machine frame and the actuator on to the opening edge of the door. Always try to mount the switch on non-ferrous material. (*Ferrous materials may reduce the switching distance.*)

Use the tamper proof screws provided to make more secure.

Do not use the safety switch as a door stop.



Leave a minimum of 50 mm between any adjacent switches.

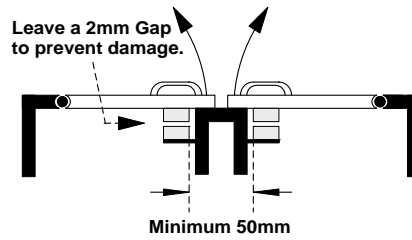

EN 1088


Provides some mounting suggestions, see example opposite.

When fixing the safety switch to a sliding door (A), ensure that when the door is opened (B) it is not easily accessible, helping prevent the system being overridden.




Contacts & Connections

MA-14DP11
MA-34DS11

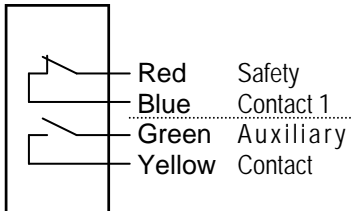

MA-14DP10
MA-34DS10




All Safety contacts should be fused externally

		Safety Contacts External Fuse DC
MA-14DP11 / MA-14DP10 / MA-34DS11 / MA-34DS10		0.8 Amps Quick Blow
		-

Dimensions


MA-14 RED ABS HOUSING

Dimensions in mm and [inches in brackets]

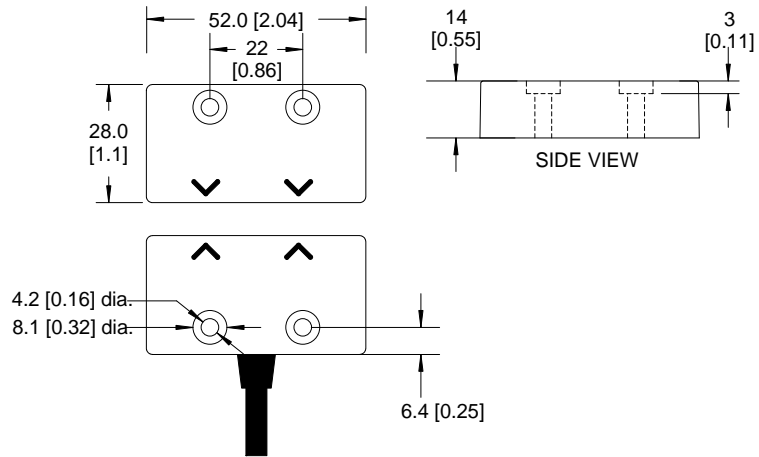

MA-34 316 STAINLESS STEEL HOUSING

Dimensions in mm and [inches in brackets]

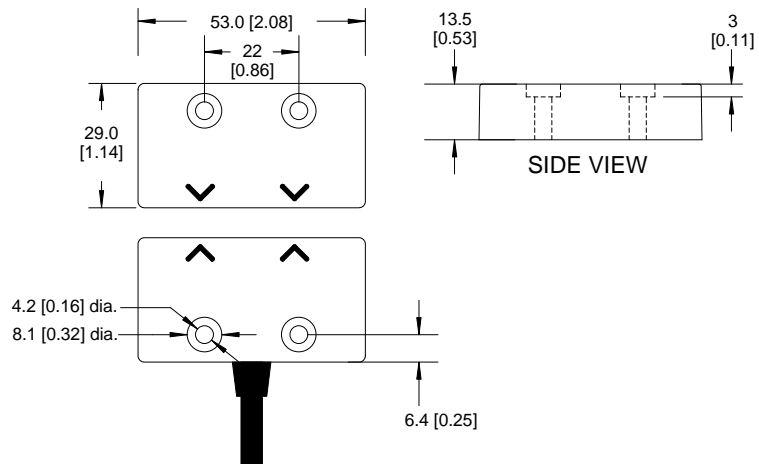

Technical Specifications

	DC	
Type	MA-14DP10 MA-34DS10	MA-14DP11 MA-34DS11
Contact Arrangement	1 x N/C Safety	1 x N/C Safety & 1 x N/O Aux.
Safety Contact Rating	30Vdc / 1Amp Inductive/ Res.	30Vdc / 1Amp Inductive/ Res.
Safety Contact Operating Distance	10mm ON / 25mm OFF	10mm ON / 25mm OFF
Safety Contact Close/Drop/Bounce	3ms / 2.1ms / 0.7ms	3ms / 2.1ms / 0.7ms
Auxiliary Contact Rating	N/A	15W / 10VA
Auxiliary Contact Operating Distance	N/A	8mm OFF / 10mm ON
Auxiliary Contact Close/Drop/Bounce	N/A	0.5ms / 0.3ms / 0.7ms
Internal Fuse	1Amp Fast Acting	1Amp Fast Acting
External Fuse (Customer Supplied)	0.8 Amp Fast Acting	0.8 Amp Fast Acting
IP Rating	IP67	IP67
Vibration / Shock	50—100Hz / 10g	50—100Hz / 10g
Operating Temperature	-10 to +55C	-10 to +55C
Mounting & Fixture	Target to Target	Target to Target
Connection	Pre-wired cable	Pre-wired cable
Construction	Red ABS Resin Filled or 316 Grade Stainless Steel	Red ABS Resin Filled or 316 Grade Stainless Steel

Specification Changes

In the interest of product development, specifications are subject to change without notice.

Note

The safety contacts of the Omron Scientific Technologies, Inc. switches are described as normally closed (N/C)
i.e. With the guard closed, actuator in place, and the machine able to be started.

OMRON AUTOMATION AND SAFETY • THE AMERICAS HEADQUARTERS • Chicago, IL USA • 847.843.7900 • 800.556.6766 • www.omron247.com

OMRON CANADA, INC. • HEAD OFFICE

Toronto, ON, Canada • 416.286.6465 • 866.986.6766 • www.omron247.com

OMRON ELECTRONICS DE MEXICO • HEAD OFFICE

México DF • 52.55.59.01.43.00 • 01-800-226-6766 • mela@omron.com

OMRON ELECTRONICS DE MEXICO • SALES OFFICE

Apodaca, N.L. • 52.81.11.56.99.20 • 01-800-226-6766 • mela@omron.com

OMRON ELETRÔNICA DO BRASIL LTDA • HEAD OFFICE

São Paulo, SP, Brasil • 55.11.2101.6300 • www.omron.com.br

OMRON ARGENTINA • SALES OFFICE

Cono Sur • 54.11.4783.5300

OMRON CHILE • SALES OFFICE

Santiago • 56.9.9917.3920

OTHER OMRON LATIN AMERICA SALES

54.11.4783.5300

OMRON EUROPE B.V. • Wegalaan 67-69, NL-2132 JD, Hoofddorp, The Netherlands. • +31 (0) 23 568 13 00 • www.industrial.omron.eu

Authorized Distributor:

Automation Control Systems

- Machine Automation Controllers (MAC) • Programmable Controllers (PLC)
- Operator interfaces (HMI) • Distributed I/O • Software

Drives & Motion Controls

- Servo & AC Drives • Motion Controllers & Encoders

Temperature & Process Controllers

- Single and Multi-loop Controllers

Sensors & Vision

- Proximity Sensors • Photoelectric Sensors • Fiber-Optic Sensors
- Amplified Photomicrosensors • Measurement Sensors
- Ultrasonic Sensors • Vision Sensors

Industrial Components

- RFID/Code Readers • Relays • Pushbuttons & Indicators
- Limit and Basic Switches • Timers • Counters • Metering Devices
- Power Supplies

Safety

- Laser Scanners • Safety Mats • Edges and Bumpers • Programmable Safety Controllers • Light Curtains • Safety Relays • Safety Interlock Switches