Perimeter Access Guarding

PA4600-BB

Entry/Exit Access Guarding Device

- 2 beams available
- Operating range of 8 m
- Compact size 46 x 55 mm (1.81 x 2.17 in.)
- Simple "one-box" active/passive design
- Individual Beam Indicators
- Simplified wiring electrical connections only required at transceiver
- A Rapid Delivery Product: Select models are available for shipment today or within 3 to 5 days



Specifications

Performance				
Protective Height:	500 and 600 mm			
Operating Range:	0.8 to 8 m			
Response Time:	Transmit Code A: <24 ms; Transmit Code B: <20 ms; Transmit Code C: <16 ms			
Safety Output:	Two PNP, each output sourcing 625 mA @ 24 VDC, short circuit protected (See note 1 below)			
Auxiliary (Non-Safety) Output:	One NPN output sinking 100 mA @ 24 VDC or PNP output sourcing 100 mA @ 24 VDC. Both available in follow or fault operating modes.			
External Device Monitoring:	50 mA @ 24 VDC steady state (See note 2 below)			
Start/Restart:	N.O. input. Momentary contact (10 mA consumption)			
Effective Aperture Angle:	± 2.5° maximum, transmitter and receiver at operating range greater than 3 m per IEC 61496-2			
Light Source:	Infrared light emitting diode, 880 nm			
Transceiver Indicator Lights:	Machine run (green), machine stop (red), interlock/fault (yellow), active (yellow), individual beam and two 7-segment displays (red)			
Electrical				
Power Input:	Transceiver: 24 VDC ± 20% 1.6 A max. (transceiver 250 mA + OSSD1 625 mA max. + OSSD2 625 mA max. + auxiliary 100 mA max.). (See note 1 below.) Power Supply must meet requirements of IEC 60204-1 and IEC 61496. STI part number 42992 or equivalent. (See note 1 below.)			
Mechanical				
Construction:	Polyester powder-painted aluminum			
Cable Length:	Available in 10, 15 and 30 m lengths, unshielded.			
Minimum Cable Gauge:	22 AWG (0.32 mm ²) for user-supplied cables			
Connection Type:	M-12, 8-pin connector			
Environmental				
Enclosure Rating:	IP67			
Operating Temperature:	0 to 55°C (32 to 131°F)			
Relative Humidity:	95% maximum, non-condensing			
Approvals	ESPE Type 4 (IEC 61496-1/-2) Category 4 / PL e (EN ISO 13849-1) SIL3 / SIL3 CL3 (IEC 61508 / EN 62061) UL508, UL1998, CAN/CSA-C22.2 No. 14, CAN/CSA-C22.2 No. 0.8, CAN/CSA-C22.2 No 0, CAN/CSA-C22.2 No 205			

Description

The Entry Exit

PA4600-BB is a short range, two-beam safeguarding device. It is suited to detect the torsos of personnel entering a hazardous area. Installation and alignment is simplified with Individual Beam Indicators, which glow red when the beam is out of alignment or blocked. The separate Scan Codes allow the installer to select unique scan frequencies that eliminate cross-talk with adjacent PA4600 systems. Diagnostics are greatly enhanced with the LED status indicators and numeric displays. The active-passive design simplifies the electrical connections, as no connections are needed at the Passive (mirror) assembly.

Specifications subject to change without notification.

Note 1: Total system current requirement is the sum of transceiver (250 mA), OSSD1 (625 mA max.), OSSD2 (625 mA max.) and Aux. output (100 mA max.).


Note 2: 24 VDC is nominal. Actual voltage is dependent upon supply, V = Vsupply - 2V.




C-7

(mm/in.)

Dimensions



Wiring

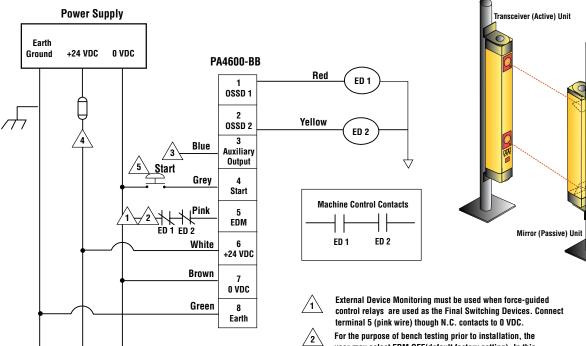

PA4600-BB Dimensions and Shipping Weights

	A Beam Spacing mm/in.	B Mounting Holes mm/in.	C Overall Height mm/in.	D Sensor Height mm/in.	System Shipping Weights kg/lb.
PA46-BB-2-500**	500/19.69	760.84/29.95	781.09/30.75	720/28.34	6.3/14
PA46-BB-2-600*	600/23.62	860.84/33.90	881.09/34.70	820/32.28	6.7/15


*Meets ANSI/RIA R15.06-1999 (R2009)

**Meets EN999: 1998

- For the purpose of bench testing prior to installation, the
- user may select EDM OFF(default factory setting). In this case the EDM line, terminal 5 (pink wire) must be connected to the 0 VDC line.

Aux. Output NPN or PNP 100 mA. max. @ 24VDC, connect to PLC ∕3∖

User-supplied fuse (2 A time lag type) ∕4∖



Note: The conductor colors are reference to the optional cables available from Omron STI.



Mirrors

C-8

Ordering

To order a Perimeter Access PA4600-BB system, simply choose from the selection below.

Model	Part No.	Description			
Perimeter Access PA4600-BB					
PA46-BB-2-500	40386-1001	2 beams with 500 mm spacing**			
PA46-BB-2-600	40386-1009	2 beams with 600 mm spacing*			
*Meets ANSI/RIA R15.06-1999 (R2009)					

**Meets EN999: 1998

Accessories (sold separately)

Part Number	Description			
Transceiver Cables				
CBL-LCRX-10M	Receiver Cable, 10 m (32.8 ft)			
CBL-LCRX-15M	Receiver Cable, 15 m (49.3 ft)			
CBL-LCRX-30M	Receiver Cable, 30 m (98.5 ft)			
Resource Modules				
RM-1	RM-1 Resource Module			
RM-2	RM-2 Resource Module			
RM-2AC	RM-2AC Resource Module/Power Supply			
RM-2AC-IP	RM-2AC-IP Resource Module/Power Supply			
RM-3	RM-3 Resource Mute Module			
RM-X	RM-X Safety Relay, 22.5 mm DIN enclosure			

For information on Resource Modules, see page D-63

For information on safety light curtain accessories, see page D-78

Safety Standards and Precautions

The PA4600-BB is a presence sensing device used only for perimeter access guarding applications, such as around robots and workcells. The PA4600-BB meets ANSI/RIA R15.06-1999 (R2009) and EN999:1998 optical configuration requirements for perimeter access guarding presence-sensing devices. PA4600-BB systems have been EC type examined to the requirements of IEC 61496-1, -2 for a Type 4 ESPE. The PA4600-BB also meets the control reliability requirements of ANSI/RIA R15.06-1999 (R2009).

The optical design and detection capability of the PA4600-BB are optimized for torso detection of personnel entering a hazardous area from the perimeter, also called perimeter access guarding. It is not intended to be used for the detection of hands and fingers. It is not designed for, nor should it be used as, a high-resolution point-of-operation safety light curtain. The safety beams have been positioned to meet ANSI/RIA R15.06-1999 (R2009) and EN999:1998 perimeter guarding requirements. These documents are an excellent reference for the application of perimeter guarding optical devices such as the PA4600-BB.

The PA4600-BB should only be used on machinery that can consistently and immediately stop anywhere in its cycle or stroke. Never use a PA4600-BB to guard the perimeter of a full revolution clutched power press or machine. If the PA4600-BB does not protect all access to the hazardous area, other appropriate devices such as mechanical guards must guard the unprotected access.

The purchaser, installer and employer have the responsibility to meet all local, state and federal government laws, rules, codes or regulations relating to the proper use, installation, operation and maintenance of this control and the guarded machine. See the Installation and Operation Manual for more information.

All application examples described are for illustration purposes only. Actual installations will differ from those indicated.

С





Terms and Conditions of Sale

- 1. Offer: Acceptance. These terms and conditions (these "Terms") are deemed Oner, Acceptative: These terms and conducts (these <u>Terms</u>) are deemed part of all quotes, agreements, purchase orders, acknowledgments, price lists, catalogs, manuals, brochures and other documents, whether electronic or in writing, relating to the sale of products or services (collectively, the "Products") by Omron Electronics LLC and its subsidiary companies ("Omron"). Omron objects to any terms or conditions proposed in Buyer's purchase order or other decomparise the terms of the sale of products with the terms of terms of the terms of the terms of term documents which are inconsistent with, or in addition to, these Terms.
- Prices; Payment Terms. All prices stated are current, subject to change with-out notice by Omron. Omron reserves the right to increase or decrease prices on any unshipped portions of outstanding orders. Payments for Products are due net 30 days unless otherwise stated in the invoice.
- Discounts. Cash discounts, if any, will apply only on the net amount of invoices sent to Buyer after deducting transportation charges, taxes and duties, and will be allowed only if (i) the invoice is paid according to Omron's payment terms and (ii) Buyer has no past due amounts.
- Interest. Omron, at its option, may charge Buyer 1-1/2% interest per month or the maximum legal rate, whichever is less, on any balance not paid within the stated terms.
- Orders. Omron will accept no order less than \$200 net billing. <u>Governmental Approvals.</u> Buyer shall be responsible for, and shall bear all costs involved in, obtaining any government approvals required for the impor-6 tation or sale of the Products.
- Taxes. All taxes, duties and other governmental charges (other than general real property and income taxes), including any interest or penalties thereon, imposed directly or indirectly on Omron or required to be collected directly or 7 indirectly by Omron for the manufacture, production, sale, delivery, importa-tion, consumption or use of the Products sold hereunder (including customs duties and sales, excise, use, turnover and license taxes) shall be charged to and remitted by Buyer to Omron. <u>Financial.</u> If the financial position of Buyer at any time becomes unsatisfactory
- to Omron, Omron reserves the right to stop shipments or require satisfactory security or payment in advance. If Buyer fails to make payment or otherwise comply with these Terms or any related agreement, Omron may (without liability and in addition to other remedies) cancel any unshipped portion of Prod-ucts sold hereunder and stop any Products in transit until Buyer pays all amounts, including amounts payable hereunder, whether or not then due, which are owing to it by Buyer. Buyer shall in any event remain liable for all unpaid accounts
- Cancellation: Etc. Orders are not subject to rescheduling or cancellation unless Buyer indemnifies Omron against all related costs or expenses. 9
- Force Majeure. Omron shall not be liable for any delay or failure in delivery resulting from causes beyond its control, including earthquakes, fires, floods, strikes or other labor disputes, shortage of labor or materials, accidents to 10.
- anchinery, acts of sabotage, riots delay in or lack of transportation or the requirements of any government authority.
 11. Shipping: Delivery. Unless otherwise expressly agreed in writing by Omron:

 a. Shipments shall be by a carrier selected by Omron; Omron will not drop ship except in "break down" situations.
 - b. Such carrier shall act as the agent of Buyer and delivery to such carrier shall constitute delivery to Buyer;
 c. All sales and shipments of Products shall be FOB shipping point (unless oth-
 - erwise stated in writing by Omron), at which point title and risk of loss shall pass from Omron to Buyer; provided that Omron shall retain a security interest in the Products until the full purchase price is paid; d. Delivery and shipping dates are estimates only; and e. Omron will package Products as it deems proper for protection against nor-
- mal handling and extra charges apply to special conditions. 12. <u>Claims.</u> Any claim by Buyer against Omron for shortage or damage to the
- Products occurring before delivery to the carrier must be presented in writing to Omron within 30 days of receipt of shipment and include the original trans-portation bill signed by the carrier noting that the carrier received the Products from Omron in the condition claimed. 13. Warranties. (a) Exclusive Warranty. Omron's exclusive warranty is that the
- roducts will be free from defects in materials and workmanship for a period of twelve months from the date of sale by Omron (or such other period expressed in writing by Omron). Omron disclaims all other warranties, express or implied. (b) <u>Limitations</u>. OMRON MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, ABOUT NON-INFRINGEMENT, MERCHANTABIL-

Certain Precautions on Specifications and Use

- Suitability of Use. Omron Companies shall not be responsible for conformity 1. with any standards, codes or regulations which apply to the combination of the Product in the Buyer's application or use of the Product. At Buyer's request, Omron will provide applicable third party certification documents identifying ratings and limitations of use which apply to the Product. This information by itself is not sufficient for a complete determination of the suitability of the Prod-uct in complete determination of the suitability of the Prod-uct in complete determination events or other application. uct in combination with the end product, machine, system, or other application or use. Buyer shall be solely responsible for determining appropriateness of the particular Product with respect to Buyer's application, product or system. Buyer shall take application responsibility in all cases but the following is a non-exhaustive list of applications for which particular attention must be given: Outdoor use, uses involving potential chemical contamination or electrical interference, or conditions or uses not described in this document.

 (ii) Use in consumer products or any use in significant quantities.
 (iii) Energy control systems, combustion systems, railroad systems, aviation systems, medical equipment, amusement machines, vehicles, safety equipment, and installations subject to separate industry or government regulations. (iv) Systems, machines and equipment that could present a risk to life or property. Please know and observe all prohibitions of use applicable to this Product

NEVER USE THE PRODUCT FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY OR IN LARGE QUANTITIES WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO

ITY OR FITNESS FOR A PARTICULAR PURPOSE OF THE PRODUCTS. BUYER ACKNOWLEDGES THAT IT ALONE HAS DETERMINED THAT THE PRODUCTS WILL SUITABLY MEET THE REQUIREMENTS OF THEIR INTENDED USE. Omron further disclaims all warranties and responsibility of any type for claims or expenses based on infringement by the Products or oth-erwise of any intellectual property right. (c) <u>Buyer Remedy</u>. Omron's sole obli-gation hereunder shall be, at Omron's election, to (i) replace (in the form originally shipped with Buyer responsible for labor charges for removal or replacement thereof) the non-complying Product, (ii) repair the non-complying Product, or (iii) repair, indemnity or any other claims or expenses regarding the Product, university or credit Buyer an amount equal to the purchase price of the non-complying Product; provided that in no event shall Omron be responsi-ble for warranty, repair, indemnity or any other claims or expenses regarding the Products unless Omron's analysis confirms that the Products were prop-erly handled, stored, installed and maintained and not subject to contamination, abuse, misuse or inappropriate modification. Return of any Products by Buyer must be approved in writing by Omron before shipment. Omron Compa-nies shall not be liable for the suitability or unsuitability or the results from the use of Products in combination with any electrical or electronic components, circuits, system assemblies or any other materials or substances or environ-ments. Any advice, recommendations or information given orally or in writing, are not to be construed as an amendment or addition to the above warranty. See http://www.omron247.com or contact your Omron representative for published information.

- Limitation on Liability: Etc. OMRON COMPANIES SHALL NOT BE LIABLE FOR SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS OR PRODUCTION OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCTS, WHETHER SUCH CLAIM IS BASED IN CONTRACT, WARRANTY, NEGLIGENCE OR STRICT LIABILITY. Further, in no event shall liability of Omron Companies exceed the individual price of the Product on which liability is asserted.
- Indemnities. Buyer shall indemnify and hold harmless Omron Companies and their employees from and against all liabilities, losses, claims, costs and expenses (including attorney's fees and expenses) related to any claim, inves-tigation, litigation or proceeding (whether or not Omron is a party) which arises or is alleged to arise from Buyer's acts or omissions under these Terms or in or is used to arise the the Surger's acts or omissions under these terms or in 15. any way with respect to the Products. Without limiting the foregoing, Buyer (at its own expense) shall indemnify and hold harmless Omron and defend or settle any action brought against such Companies to the extent based on a claim
- that any Product made to Buyer specifications infringed intellectual property rights of another party. <u>Property: Confidentiality.</u> Any intellectual property in the Products is the exclusive property of Omron Companies and Buyer shall not attempt to duplicate it in any way without the written permission of Omron. Notwithstanding any background buyer and buyer shall not attempt and buyer shall be and buyer shall be and buyer shall be an any background buyer buyer buyer buyer buyer buyers buyer buyers buyer buyers buyer buyers bu 16 charges to Buyer for engineering or tooling, all engineering and tooling shall remain the exclusive property of Omron. All information and materials supplied by Omron to Buyer relating to the Products are confidential and proprietary, and Buyer shall limit distribution thereof to its trusted employees and strictly prevent disclosure to any third party.
- Export Controls. Buyer shall comply with all applicable laws, regulations and licenses regarding (i) export of products or information; (iii) sale of products to "forbidden" or other proscribed persons; and (ii) disclosure to non-citizens of regulated technology or information. <u>Miscellaneous</u>. (a) <u>Waiver</u>. No failure or delay by Omron in exercising any right 17.
- Miscentaneous. (a) watver, No failure of delay by Offron in exercising any fight and no course of dealing between Buyer and Omron shall operate as a waiver of rights by Omron. (b) <u>Assignment</u>. Buyer may not assign its rights hereunder without Omron's written consent. (c) <u>Law</u>. These Terms are governed by the law of the jurisdiction of the home office of the Omron company from which Buyer is purchasing the Products (without regard to conflict of law princi-Buyer is parchasing the Products (without regard to conflict of hav principles). (d) <u>Amendment</u>. These Terms constitute the entire agreement between Buyer and Omron relating to the Products, and no provision may be changed or waived unless in writing signed by the parties. (e) <u>Severability</u> If any provi-sion hereof is rendered ineffective or invalid, such provision shall not invalidate any other provision. (f) <u>Setoff</u>. Buyer shall have no right to set off any amounts argient the empeuter without is concerned to this invalid. (a) Definitions (b) and (b) and (c) against the amount owing in respect of this invoice. (g) <u>Definitions</u> As used herein, "<u>including</u>" means "including without limitation"; and "<u>Omron Compa-nies</u>" (or similar words) mean Omron Corporation and any direct or indirect subsidiary or affiliate thereof.

ADDRESS THE RISKS, AND THAT THE OMRON'S PRODUCT IS PROP-ERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.

- Programmable Products. Omron Companies shall not be responsible for the 2. 3
- <u>Programmable Products</u>. Omron Companies shall not be responsible for the user's programming of a programmable Product, or any consequence thereof. <u>Performance Data</u>. Data presented in Omron Company websites, catalogs and other materials is provided as a guide for the user in determining suitabil-ity and does not constitute a warranty. It may represent the result of Omron's test conditions, and the user must correlate it to actual application require-ments. Actual performance is subject to the Omron's Warranty and Limitations of Liability.
- <u>Change in Specifications</u>. Product specifications and accessories may be changed at any time based on improvements and other reasons. It is our prac-4 tice to change part numbers when published ratings or features are changed, or when significant construction changes are made. However, some specifica-tions of the Product may be changed without any notice. When in doubt, special part numbers may be assigned to fix or establish key specifications for your application. Please consult with your Omron's representative at any time to confirm actual specifications of purchased Product.
- Errors and Omissions. Information presented by Omron Companies has been checked and is believed to be accurate; however, no responsibility is assumed 5. for clerical, typographical or proofreading errors or omissions.



OMRON AUTOMATION AND SAFETY • THE AMERICAS HEADQUARTERS • Chicago, IL USA • 847.843.7900 • 800.556.6766 • www.omron247.com

OMRON CANADA, INC. • HEAD OFFICE Toronto, ON, Canada • 416.286.6465 • 866.986.6766 • www.omron247.com

OMRON ELECTRONICS DE MEXICO • HEAD OFFICE México DF • 52.55.59.01.43.00 • 01-800-226-6766 • mela@omron.com

OMRON ELECTRONICS DE MEXICO • SALES OFFICE Apodaca, N.L. • 52.81.11.56.99.20 • 01-800-226-6766 • mela@omron.com

OMRON ELETRÔNICA DO BRASIL LTDA • HEAD OFFICE São Paulo, SP, Brasil • 55.11.2101.6300 • www.omron.com.br OMRON ARGENTINA • SALES OFFICE Cono Sur • 54.11.4783.5300

OMRON CHILE • SALES OFFICE Santiago • 56.9.9917.3920

OTHER OMRON LATIN AMERICA SALES 54.11.4783.5300

OMRON EUROPE B.V. • Wegalaan 67-69, NL-2132 JD, Hoofddorp, The Netherlands. • +31 (0) 23 568 13 00 • www.industrial.omron.eu

Authorized Distributor:

Automation Control Systems

Machine Automation Controllers (MAC) • Programmable Controllers (PLC)
 Operator interfaces (HMI) • Distributed I/O • Software

Drives & Motion Controls

Servo & AC Drives
 Motion Controllers & Encoders

Temperature & Process Controllers

• Single and Multi-loop Controllers

Sensors & Vision

- Proximity Sensors Photoelectric Sensors Fiber-Optic Sensors
- Amplified Photomicrosensors
 Measurement Sensors
- Ultrasonic Sensors
 Vision Sensors

Industrial Components

- RFID/Code Readers Relays Pushbuttons & Indicators
- Limit and Basic Switches
 Timers
 Counters
 Metering Devices
- Power Supplies

Safety

Laser Scanners • Safety Mats • Edges and Bumpers • Programmable Safety
 Controllers • Light Curtains • Safety Relays • Safety Interlock Switches