

Setup Procedure

This document shows the setup procedure you should follow after unpacking the product of OS-installed model.

⚠ CAUTION

- For OS-installed model's SSD and Compact Flash Card (hereinafter referred to as CF card), all areas of them are occupied in NTFS and Windows® Embedded Standard 2009 model uses a part of them for EWF function.
 - Device drivers have already been installed. But you should set up a network separately. Please consult the system administrator of your network about it.
-

Before turning power on

- For OS-installed model with Windows® Embedded Standard 2009, the OS will boot up automatically after turning power on. Then it is ready to use immediately.

Setup of Windows® Embedded Standard 2009

1. Preparation

Please connect the power supply to the main body and turn power on. A keyboard and a mouse will make the setup easier.

2. Setting of Screen

Our factory setting of "Screen Resolution" is SVGA (800 x 600).

3. Service


- How to start up IIS (Internet Information Service)

You should start up related services.


- ✓ Event Log Service
- ✓ FTP Publishing Service
- ✓ IIS Admin Service
- ✓ World Wide Web Publishing Service

Please execute above settings on Service of Management Tool, or enable services according to the procedures below.

i. Please find the file “IIS_ENABLE.REG “in the folder “WINDOWS”.

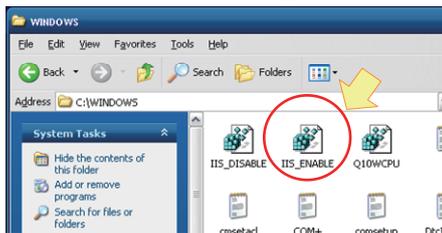

ii. Please double-click this file, and then the following message will appear to confirm. Please click **Yes**.

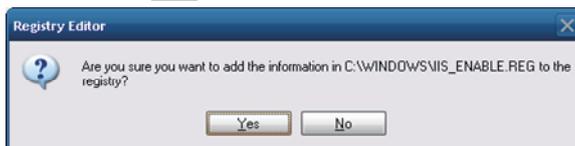

iii. Next, the following message will appear. Please click **OK**.



iv. No further setting is necessary. After the reboot of Windows, IIS function becomes active.

4. User Name and Password

On our factory setting, you can log on automatically. But when you need to input a user name or a password, please input as follows.

User Name	Administrator
Password	Administrator